

**MAP OF SURVEY**


Located in Section 25, Township 36 South, Range 3 East of the Willamette Meridian, Jackson County, Oregon.

for

**The U.S. FOREST SERVICE**

REF. CONTRACT NO. 43-04N7-5-557

**BASIS OF BEARING:** Solar Observation.  
 ○ Found monuments as shown. (SEE NARRATIVE)  
 ● Set 2" x 30" flanged galvanized iron pipe with a 2 1/2" brass cap.  
**SCALE:** 1" = 400'  
 1 meter = 3.28083333 feet  
**REF:** Fieldbooks 1 and 2 of 2 JILL CADASTRAL SURVEY, CONTRACT NO. 43-04N7-5-557.  
**DATE:** Survey began July 16, 1985  
 Completed August 21, 1985.

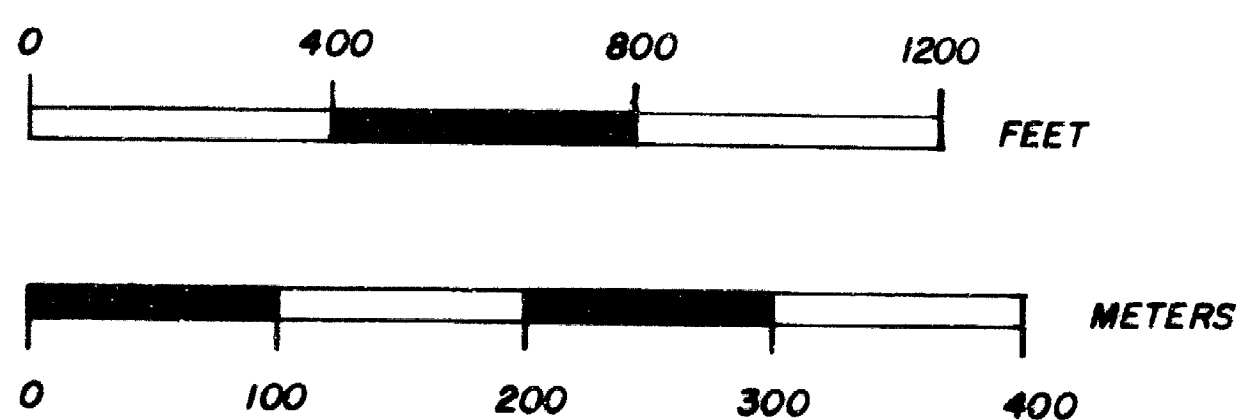

**\*\* RECEIVED \*\***  
 Date 9/17/85 By SK  
 This survey consists of:  
1 sheet(s) Map  
4 page(s) Narrative  
 JACKSON COUNTY SURVEYOR

MEAN MAGNETIC DECLINATION = 16°28' EAST

**CONTRACT SURVEYOR'S CERTIFICATE:**

I, KURT C. WEAVER, A REGISTERED PROFESSIONAL LAND SURVEYOR IN THE STATE OF OREGON, HEREBY CERTIFY THAT THIS PLAT AND THE NOTES HEREON, OR ATTACHED, ARE A CORRECT REPRESENTATION OF A SURVEY PERFORMED BY ME OR UNDER MY DIRECTION DURING JULY AND AUGUST OF 1985, AT THE REQUEST OF THE U.S.D.A. FOREST SERVICE, IN ACCORDANCE WITH THE STATUTES OF THE STATE OF OREGON AND THE ARTICLES OF MY CONTRACT.

*Kurt C. Weaver*  
 KURT C. WEAVER, O.R.P.L.S. 1679



**PROCEDURE:**

ALL CONTROLLING CORNERS WERE INCORPORATED IN A CLOSED TRAVERSE USING A WILD T-2 THEODOLITE AND AN H.P. 3805A E.D.M. THE SECTION WAS SUBDIVIDED AS SHOWN HEREON. RANDOM TRAVERSES WERE RUN ALONG THOSE LINES TO BE MARKED AND POSTED, THE OFFSETS WERE MEASURED FROM THE RANDOM LINE TO THE TRUE LINE. THE LINES BETWEEN NATIONAL FOREST LANDS AND OTHER OWNERSHIP WERE MARKED WITH ALUMINUM POSTS AND ATTACHED SIGNS, AND BLAZED TREES.

**HISTORY:**

SECTION 25 WAS ORIGINALLY SURVEYED BY RUFUS S. MOORE UNDER CONTRACT NO. 475, DATED JULY 3, 1883. THE EAST LINE WAS SUBSEQUENTLY RETRACED BY LINCOLN E. WILKES, U.S.C.E. UNDER GROUP NO. 86, DATED JUNE 7, 1922. WILKES SET A QUARTER CORNER FOR SECTION 30 ONLY AND REMARKED THE STONE SET BY MOORE AS A 1/4 CORNER FOR SECTION 25 ONLY. ALL OF THE ORIGINAL CORNERS FOR SECTION 25 WITH THE EXCEPTION OF THE SOUTH QUARTER CORNER ARE B.L.M. REMONUMENTATIONS. THE SOUTH QUARTER CORNER WAS SET VIA PROPORTIONATE MEASUREMENT BY HAROLD CENTER DURING THE PERFORMANCE OF FILED SURVEY NO. 7978. THE EAST 1/16 CORNER COMMON TO SECTIONS 25 AND 36 WAS ALSO SET BY HAROLD CENTER ON SAID SURVEY NO. 7978.

EXAMINED AND ACCEPTED FOR THE U.S. FOREST SERVICE THIS 17<sup>th</sup> DAY OF September, 1985.

*Harold Center* O.R.S.

10370

10370

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250.

Survey for: Rogue River National Forest  
P.O. Box 520  
Medford, Oregon 97501

Location: Located in Section 25, Township 36 South, Range 3 East of the Willamette Meridian, Jackson County, Oregon.

Purpose: To subdivide said Section 25 in order to monument the corner positions as shown on the accompanying map. Also to mark the boundary between Forest Service and private ownership with signs attached to aluminum posts and blazed trees per U.S.F.S. contract specifications.

Procedure: All controlling corners were incorporated in a series of closed traverses. The section was subdivided as shown on the accompanying map. The north and west lines of the section were marked and posted, as well as the north and east lines of the southeast quarter, the west and south lines of the northwest quarter of the southeast quarter, and the west line of the southeast quarter of the southeast quarter.

The south line of the section was surveyed by Harold Center during the performance of filed survey no. 7978. The south quarter corner and the east one sixteenth corner on this line were set during said survey. These monuments were held for the subdivision of the section.

The following monuments were tied or set, and the accessories to same were recorded as follows:

24|19

Section corner 25|30: Found a standard BLM pipe and brass cap exposed 6" in a mound of stone from which:

- Fir stob 23" dia. bears S 30°20'W 17.0 ft.  
(rec. S 33°W 17.2 ft.)
- White Fir 30" dia. bears S 44°46'W 57.1 ft.  
(rec. S 48°W 57.4 ft.)
- White Fir 24" dia. bears N 77°14'W 37.0 ft.  
(rec. N 74°W 37.0 ft.)
- White Fir snag 26" dia. bears N 51°17'W 12.2 ft.  
(rec. N 52°W 12.5 ft.)
- Douglas Fir 17" dia. bears N 18°48'E 13.8 ft.  
(rec. N 22°E 13.9 ft.)
- White Fir 29" dia. bears N 38°21'E 29.0 ft.  
(rec. N 36°E 27.7 ft.)
- Fir 24" dia., dead and down, bears S 69°21'E 44.5 ft.  
(rec. S 70°E 44.2 ft.)
- White Fir 12" dia. bears S 38°00'E 22.5 ft.  
(rec. S 34°E 22.1 ft.)

1/4 Corner  $\frac{24}{25}$ : Found a standard BLM pipe and brass cap exposed 6" in a mound of stone, from which:

Douglas Fir 12" dia. bears S 11°26'W 23.4 ft.  
 (rec. S 17°W 23.1 ft.)  
 White Fir snag 12" dia. bears S 49°24'W 23.4 ft.  
 (rec. S 54°W 23.8 ft.)  
 Incense Cedar 19" dia. bears N 34°26'W 47.3 ft.  
 (rec. N 30°W 46.9 ft.)  
 Douglas Fir 18" dia. bears N 62°10'E 6.9 ft.  
 (rec. N 66°E 6.6 ft.)

Section Corner  $\frac{23}{24}$   
 $\frac{26}{25}$ : Found a standard BLM pipe and brass cap exposed 14" in a mound of stone, from which:

Ponderosa Pine 25" dia. bears S 6°53'E 43.3 ft.  
 (rec. S 3°E 43.6 ft.)  
 Douglas Fir 10" dia. bears S 28°56'W 12.0 ft.  
 (rec. S 33°W 12.5 ft.)  
 Incense Cedar 38" dia., dead and down, bears S 84°28'W  
 52.4 ft. (rec. S 83°W 54.1 ft.)  
 Ponderosa Pine 24" dia. bears N 80°40'W 56.7 ft.  
 (rec. N 83°W 56.8 ft.)  
 Douglas Fir 14" dia. bears N 32°30'W 15.4 ft.  
 (rec. N 29°W 15.8 ft.)  
 Douglas Fir 16" dia. bears N 1°49'E 48.3 ft.  
 (rec. N 6°E 48.8 ft.)

1/4 Corner 26 25: Found a standard BLM pipe and brass cap leaning westerly, exposed 12" in a mound of stone, from which:

Douglas Fir 15" dia. bears N 35°25'E 11.6 ft.  
 (rec. N 39°E 10.6 ft.)  
 Ponderosa Pine 30" dia. bears S 72°00'E 36.5 ft.  
 (rec. S 70°E 35.6 ft.)  
 Douglas Fir 15" dia. bears S 87°28'W 24.3 ft.  
 (rec. West 25.1 ft.)

Section corner  $\frac{26}{25}$   
 $\frac{35}{36}$ : Found a standard BLM pipe and brass cap exposed 9" in a mound of stone, from which:

Sugar Pine 27" dia. bears N 35°35'E 52.7 ft.  
 (rec. N 38°E 52.8 ft.)  
 Douglas Fir 8" dia. bears S 56°42'E 40.1 ft.  
 (rec. S 55°E 40.3 ft.)  
 White Fir snag 24" dia. bears S 15°57'W 45.5 ft.  
 (rec. S 18°W 45.5 ft.)  
 Douglas Fir 30" dia. bears N 59°56'W 20.6 ft.  
 (rec. N 57°W 20.5 ft.)  
 Chinquapin 11" dia. bears N 20°32'W 10.3 ft.  
 (rec. N 16°W 9.9 ft.)  
 Chinquapin 5" dia. bears S 65°21'W 14.0 ft. marked X BT  
 (new tree)

25  
1/4 corner 36: Found a 2" galvanized iron pipe with a 2 1/2" brass cap exposed 7" in a mound of stone, from which:

Douglas Fir 20" dia. bears N 26°04'W 29.5 ft.  
(rec. N 26°43'W 29.42 ft.)  
White Fir 15" dia. bears S 70°55'W 21.4 ft.  
(rec. S 69°46'W 21.70 ft.)

25  
East 1/16 corner 36: Found a 2" galvanized iron pipe with a 2 1/2" brass cap exposed 2" in a mound of stone, from which:

Ponderosa Pine 23" dia. bears N 68°01'W 49.6 ft.  
(rec. N 67°36'W 50.40 ft.)  
Douglas Fir 23" dia. bears S 61°33'W 25.3 ft.  
(rec. S 61°12'W 25.55 ft.)

25 | 30  
Section corner 36 | 31: Found a standard BLM pipe and brass cap exposed 2" in a mound of stone, from which:

White Fir 46" dia. bears N 73°07'E 84.6 ft.  
(rec. N 72°E 83.8 ft.)  
Ponderosa Pine 24" dia. bears S 89°12'E 67.8 ft.  
(rec. N 89 1/2°E 68.6 ft.)  
White Fir 37" dia. bears S 11°15'E 160.6 ft.  
(rec. S 9 1/2°E 158.4 ft.)  
Sugar Pine 49" dia. bears S 21°22'W 205.4 ft.  
(rec. S 21 1/2°W 207.9 ft.)  
Douglas Fir 27" dia. bears N 80°19'W 78.7 ft.  
(rec. N 79°W 78.5 ft.)  
Ponderosa Pine 34" dia. bears N 47°46'W 108.2 ft.  
(rec. N 48°W 106.3 ft.)

1/4 corner section 25 : Found a standard BLM pipe and brass cap exposed 6" in a mound of stone, from which:

Fir 36" dia., dead and down, bears S 36°52'W 38.5 ft.  
(rec. S 34°W 36.3 ft.)  
White Fir 33" dia. bears N 41°55'W 54.8 ft.  
(rec. N 42 1/2°W 55.4 ft.)  
1" G.L.O. pipe and brass cap bears N 0°20'42"E 24.09 ft.  
(rec. North 23.76 ft.)

1/4 corner Section 30: Found a 1" G.L.O. pipe and brass cap exposed 6" in a mound of stone, from which:

White Fir 23" dia. bears N 33°07'E 17.9 ft.  
(rec. N 34°E 18.5 ft.)  
Sawed Fir stump 26" dia. bears S 73°44'E 37.1 ft.  
(rec. S 68 1/2°E 42.2 ft.)  
White Fir 13" dia. bears S 27°55'E 27.6 ft.  
(rec. S 27°E 28.27 ft.)

Center 1/4 Section 25: Set a 2"x30" galvanized iron pipe with a 2 1/2" brass cap exposed 6" and mark the following trees:

White Fir 9" dia. bears S 77°39'E 22.0 ft., marked C 1/4 S  
25 BT.  
White Fir 10" dia. bears N 00°02'W 14.3 ft., marked C 1/4 S  
25 BT.

CS 1/16 Section 25: Set a 2"x30" galvanized iron pipe with a 2 1/2" brass cap exposed 8" in a mound of stone and mark the following trees:

White Fir 20" dia. bears S 26°35'W 15.8 ft., marked CS 1/16 S 25 BT.

Douglas Fir 17" dia. bears N 56°59'W 26.8 ft., marked CS 1/16 S 25 BT.

SE 1/16 Section 25: Set a 2"x30" galvanized iron pipe with a 2 1/2" brass cap exposed 6", and mark the following trees:

White Fir 7" dia. bears N 86°40'W 18.4 ft., marked SE 1/16 S 25 BT.

Douglas Fir 10" dia. bears N 5°42'W 28.2 ft., marked SE 1/16 S 25 BT.

Bearing was based on a solar observation.

Surveyed by: Kurt C. Weaver  
616 China Gulch Road  
Jacksonville, Oregon 97530

Date: Survey began July 16, 1985, completed August 21, 1985.

