


T.38S.R.2W, W.M., JACKSON COUNTY OREGON
 DEPENDENT RESURVEY AND SUBDIVISION
 OF SECTIONS 23, 24, 25, & 26

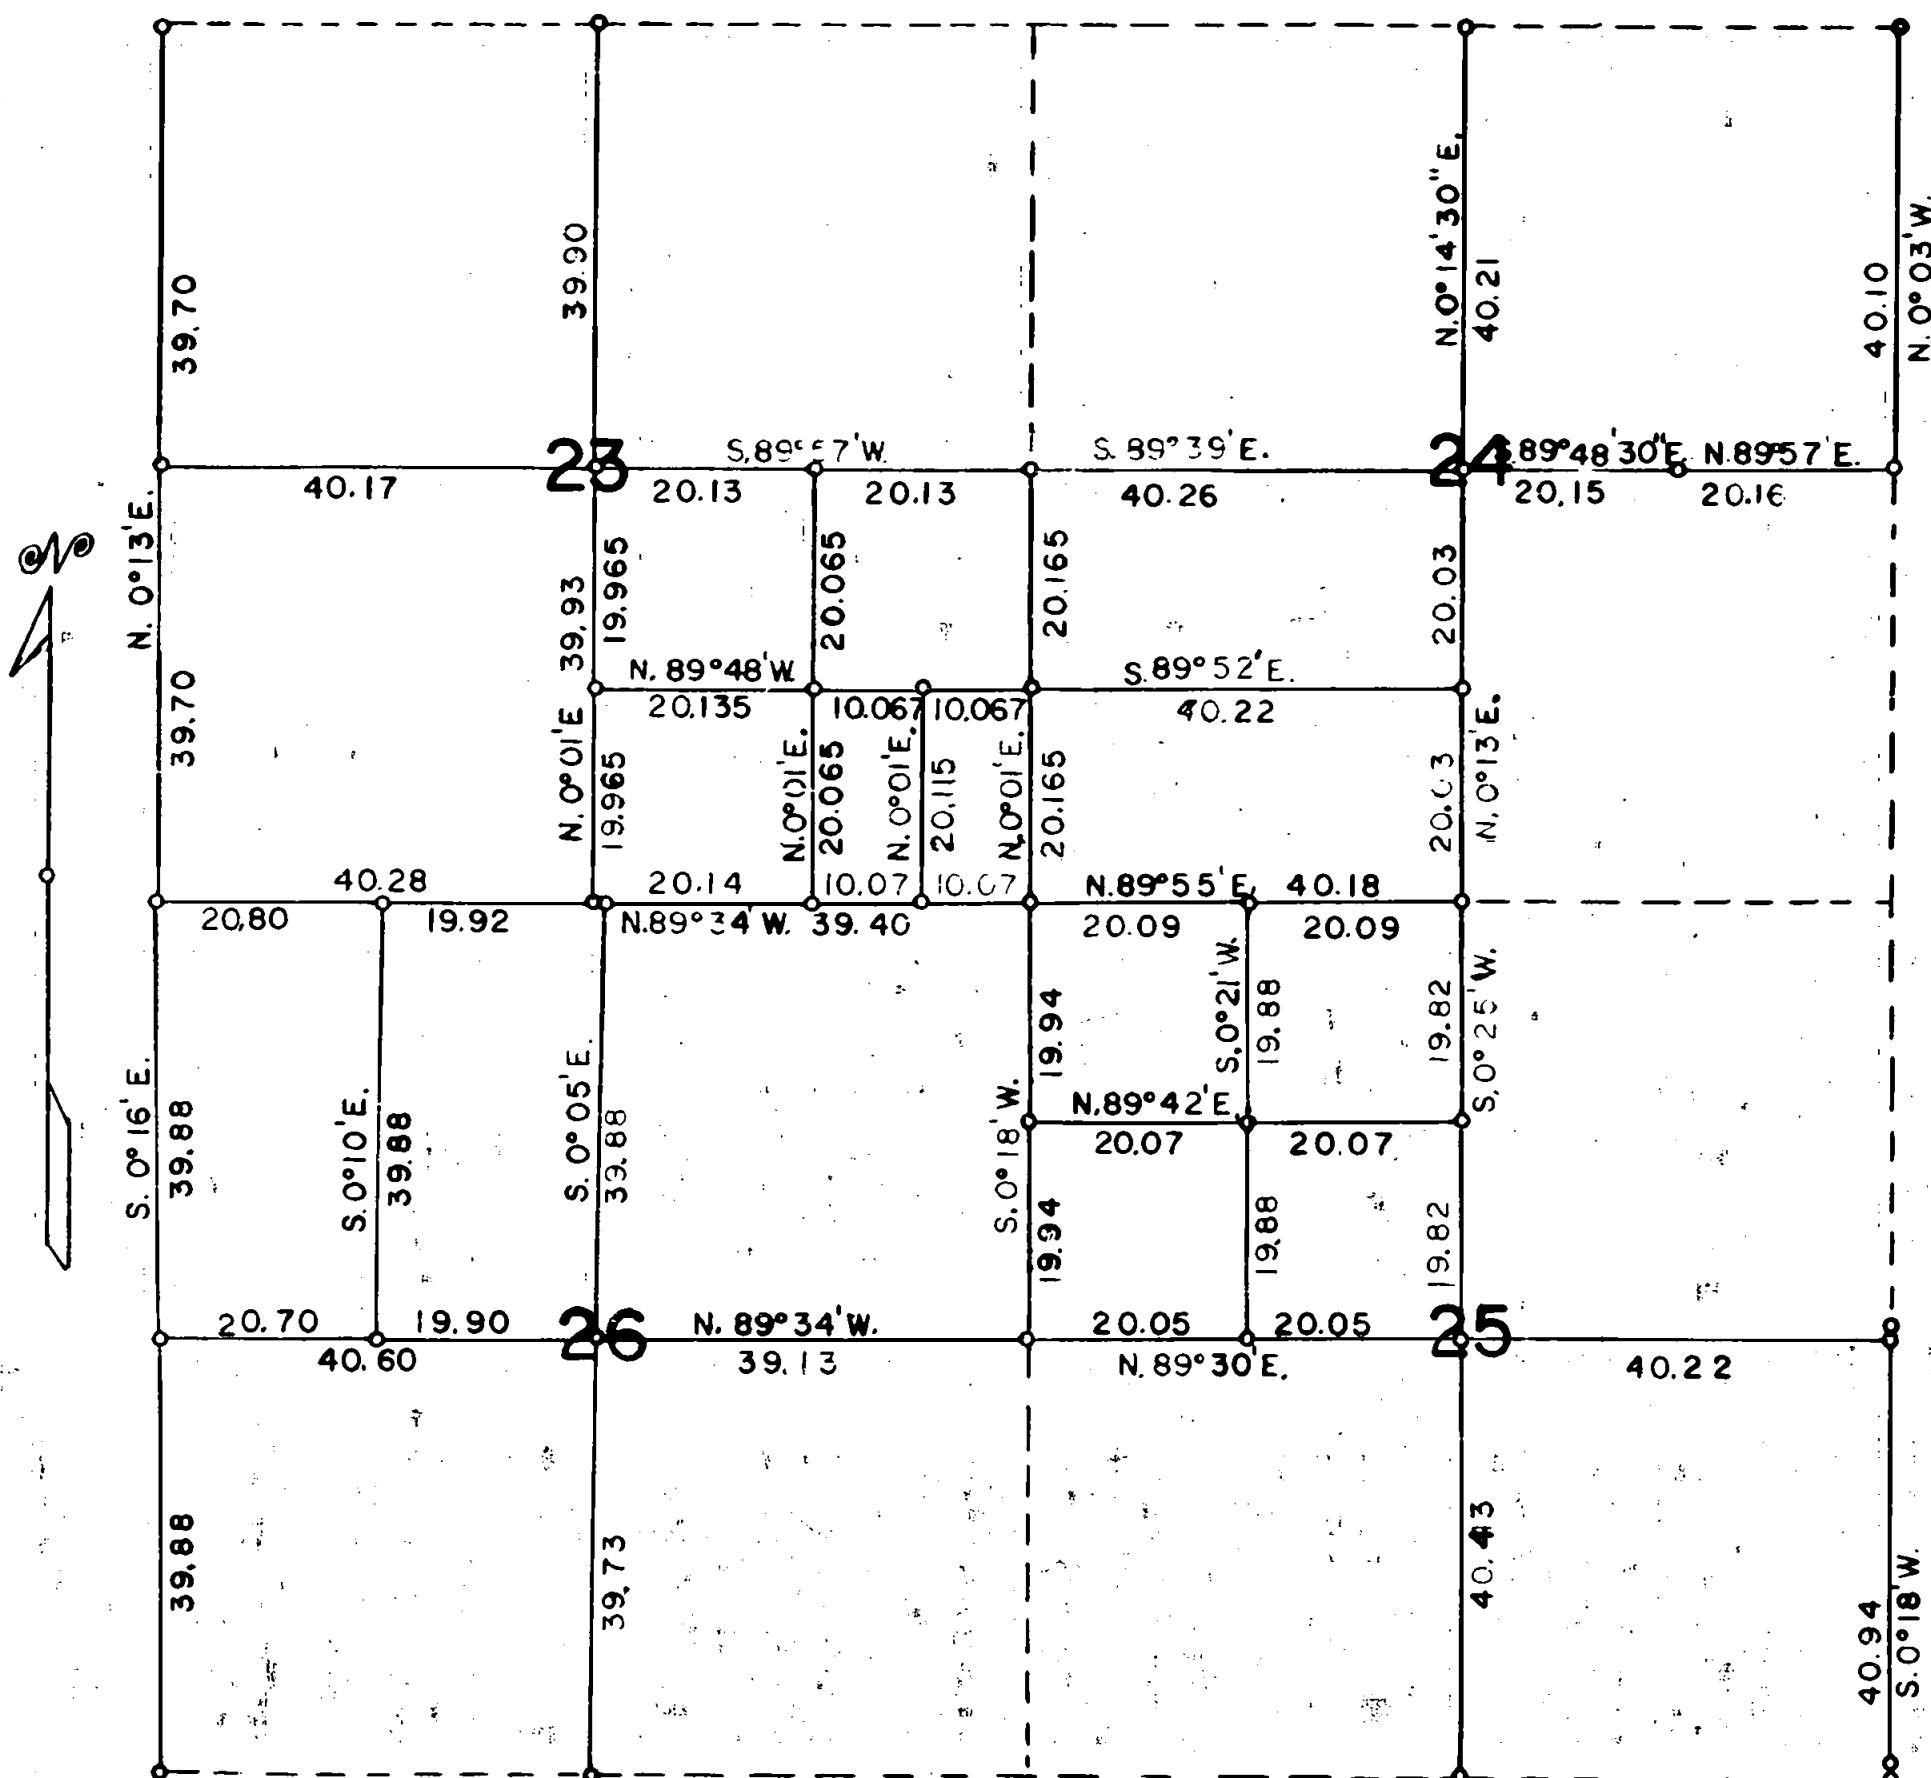

Scale: 1 in = 20 chains = 1320 feet

Mean Magnetic Declination 19°30' East


The bearings of all lines are referred to the true meridian determined by solar observations.

o = Corner Occupied and Monumented

— Lines Surveyed — — — — Lines Not Retraced

Survey executed November 30, 1960 to May 5, 1961

I hereby certify that the survey represented by this plat is executed in conformity with
 the Laws of the State of Oregon,

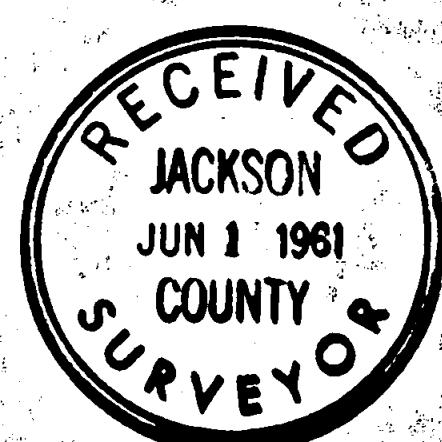


Marvin C. Ramsey

T. 38 S., R. 2 W.

Chains

At the $\frac{1}{4}$ sec. cor. on the North bdy. of sec. 26.S. $0^{\circ} 05'$ E., on the North and South center line of sec. 26.39.88 To the center $\frac{1}{4}$ sec. cor. of sec. 26.79.61 To the $\frac{1}{4}$ sec. cor. of secs. 26 and 35 determined from the original bearing trees; fail to find the corner stone.A Douglas Fir sawed stump 16 ins. in diam., bears S. 8° W., 19 lks. dist., with down tree mkd. $\frac{1}{4}$ S BT.A Douglas Fir 24 ins. in diam., bears N. 19° W., 19 lks. dist., healed.Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing treeA Douglas Fir 28 ins. in diam., bears S. 58° W., 29 lks. dist., mkd. $\frac{1}{4}$ S35 RS404 BT.

I hereby certify that the bearings of all lines recorded in this survey were determined by solar observations and that the survey described in the foregoing field notes was executed in conformity with the Laws of the State of Oregon.

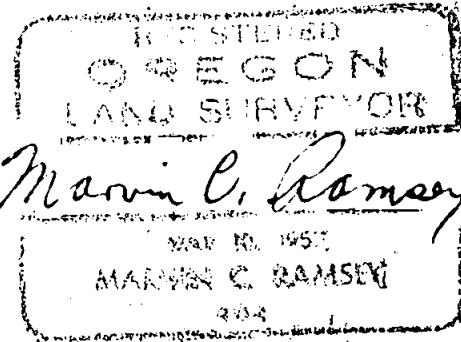

T. 38 S., R. 2 W.

Chains

79.76 The sec. cor. of secs. 26, 27, 34 and 35 is monumented with a basalt stone 6X12X8 ins. loosely set and mkd. with 1 groove on the South and 2 grooves on the East face from which two of the original bearing trees

A Douglas Fir 26 ins. in diam., bears N. 82° E., 7 lks. dist., with mks. R2 visible.

A Douglas Fir 24 ins. in diam., bears S. 23° E., 7 lks. dist., healed.

Set an iron pipe 3 ft. long 2 ins. in diam., 24 ins. in the ground, mkd. RS404, against the South side of the stone from which new bearing trees.

A Douglas Fir 18 ins. in diam., bears S. $27\frac{1}{2}^{\circ}$ W., 36 lks. dist., mkd. T38S R2W S34 RS404 BT.

A Douglas Fir 20 ins. in diam., bears N. 80° W., 64 lks. dist., mkd. T38S R2W S27 RS404 BT.

At the $\frac{1}{4}$ sec. cor. of secs. 25 and 26.

N. $89^{\circ} 34'$ W., on East and West center line of sec. 26.

39.13 Point for center $\frac{1}{4}$ sec. cor. at the intersection of the North and South center line.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 12 ins. in diam., bears N. $61\frac{1}{2}^{\circ}$ E., 76 lks. dist., mkd. C $\frac{1}{4}$ S26 RS404 BT.

A Douglas Fir 16 ins. in diam., bears S. $60\frac{1}{2}^{\circ}$ E., 307 lks. dist., mkd. C $\frac{1}{4}$ S26 RS404 BT

A Douglas Fir 14 ins. in diam., bears S. $80\frac{1}{2}^{\circ}$ W., 224 lks. dist., mkd. C $\frac{1}{4}$ S26 RS404 BT.

A Cedar 14 ins. in diam., bears N. $46\frac{1}{4}^{\circ}$ W., 27 lks. dist., mkd. C $\frac{1}{4}$ S26 RS404 BT.

59.03 Point for center West 1/16 sec. cor. of sec. 26.

Set an iron pipe 3 ft. long 1 in. in diam., 12 ins. in the ground, to bedrock with mound of stone to top, mkd. RS404, from which

A Douglas Fir 18 ins. in diam., bears S. $1\frac{1}{2}^{\circ}$ W., 98 lks. dist., mkd. CW 1/16 S26 RS404 BT.

A Douglas Fir 40 ins. in diam., bears N. $15\frac{1}{2}^{\circ}$ W., 61 lks. dist., mkd. CW 1/16 S26 RS404 BT.

79.73 To $\frac{1}{4}$ sec. cor. of secs. 26 and 27.

T. 38 S., R. 2 W.

Chains

At the $\frac{1}{4}$ sec. cor. of secs. 24 and 25.S. $0^{\circ} 25'$ W., on North and South center line of sec. 25.

19.82 Point for center North 1/16 sec. cor.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 16 ins. in diam., bears N. 34° E., 16 lks. dist., mkd. CN 1/16 S25 RS404 BT.A Douglas Fir 14 ins. in diam., bears N. 71° W., 23 lks. dist., mkd. CN 1/16 S25 RS404 BT.39.61 To center $\frac{1}{4}$ sec. cor. of sec. 2580.07 To the $\frac{1}{2}$ sec. cor. of secs. 25 and 36 determined from the only extant original bearing tree; fail to find the corner stone.A Madronal8 ins. in diam., bears S. 80° E., 14 lks. dist., with partial scribe mks. in blaze partly decayed. I remark on the bark $\frac{1}{4}$ S36 RS404 BT.Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from whichA Douglas Fir 28 ins. in diam., bears N. $64\frac{1}{2}^{\circ}$ E., 63 lks. dist., mkd. $\frac{1}{4}$ S25 RS404 BT

At the center West 1/16 sec. cor. of secs. 24 and 25.

S. $0^{\circ} 21'$ W., on the North and South center line of the Northwest $\frac{1}{4}$ of sec. 25.19.88 Point for the Northwest 1/16 sec. cor. at the intersection of the East and West center line of the Northwest $\frac{1}{4}$ of sec. 25.

Set an iron pipe 3 ft. long 1 in. ib diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 10 ins. in diam., bears S. 76° E., 10 lks. dist., mkd. NW 1/16 S25 RS404 BT.A Douglas Fir 8 ins. in diam., bears N. 70° W., 13 lks. dist., mkd. NW 1/16 S25 RS404 BT.

39.76 To the center West 1/16 sec. cor. of sec. 25.

At the sec. cor. of secs. 22, 23, 26, and 27.

S. $0^{\circ} 16'$ E., on true line bet. secs. 26 and 27.39.88 Point for $\frac{1}{4}$ sec. cor. at proportionate distance, unable to find any evidence of the original corner.Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from whichA Black Oak 8 ins. in diam., bears N. $15\frac{1}{2}^{\circ}$ E., 18 lks. dist., mkd. $\frac{1}{4}$ S26 RS404 BT.A Douglas Fir 12 ins. in diam., bears S. 43° W., 8 lks. dist., mkd. $\frac{1}{4}$ S27 RS404 BT.

T. 33 S., R. 2 W.

Chains

At the sec. cor. of secs. 23, 24, 25 and 26.

S. $0^{\circ} 18'$ W., on true line between secs. 25 and 26.

19.94 Point for North 1/16 sec. cor. of secs. 25 and 26.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which.

A Black Oak 10 ins. in diam., bears N. 59° E., 15 lks. dist., mkd. N 1/16 S25 RS404 BT.

A Cedar 20 ins. in diam., bears S. $52\frac{1}{2}^{\circ}$ W., 79 lks. dist., mkd. N. 1/16 S26 RS404 BT.

39.88 To the $\frac{1}{4}$ sec. cor. of secs. 25 and 26 determined from the original bearing trees, fail to find the corner stone.

A Yellow Pine 42 ins. in diam., bears N. 65° E., 22 lks. dist., mkd. $\frac{1}{4}$ S25 BT.

A Black Oak dead snag 12 ins. in diam., bears N. 15° W., 45 lks. dist., with partial scribe mks.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing tree

A Douglas Fir 10 ins. in diam., bears N. 84° W., 19 lks. dist., mkd. $\frac{1}{4}$ S26 RS404 BT.

Thence

N. $89^{\circ} 30'$ E., on East and West center line of sec. 25.

20.05 Point for center West 1/16 sec. cor. of sec. 25.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 8 ins. in diam., bears S. 10° E., 31 lks. dist., mkd. CW 1/16 S25 RS404 BT.

A Madrona 8 ins. in diam., bears N. 31° W., 21 lks. dist., mkd. CW 1/16 S25 RS404 BT.

40.10 Point for the center $\frac{1}{4}$ sec. cor. of sec. 25 at the intersection of the North and South center line.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 16 ins. in diam., bears N. 60° E., 52 lks. dist., mkd. C $\frac{1}{4}$ S25 RS404 BT.

A Douglas Fir 6 ins. in diam., bears S. 62° E., 2 lks. dist., mkd. C $\frac{1}{4}$ S25 RS404 BT.

A Douglas Fir 8 ins. in diam., bears S. 40° W., 13 lks. dist., mkd. C $\frac{1}{4}$ S25 RS404 BT.

A Douglas Fir 8 ins. in diam., bears N. $43\frac{1}{2}^{\circ}$ W., 21 lks. dist., mkd. C $\frac{1}{4}$ S25 RS404 BT

80.32 To the $\frac{1}{4}$ sec. cor. of sec. 25 only.

T. 38 S., R. 2 W.

Chains

Thence

N. $0^{\circ} 30'$ W., on true line bet. secs. 19 and 24.

- 40.10 The sec. cor. of secs. 13, 18, 19 and 24 is monumented with a capped iron pipe 1 in. in diam., 4 ins. below the surface of the ground and covered with a flat rock from which

A White Oak 24 ins. in diam., bears S. $22\frac{1}{2}^{\circ}$ W., 71 lks. dist., healed.The Southwest corner of a residence bears N. $23\frac{1}{2}^{\circ}$ E., 63 lks. dist.A Black Walnut 12 ins. in diam., bears N. 24° W., 38 lks. dist.,A White Oak 9 ins. in diam., bears S. $86\frac{3}{4}^{\circ}$ E., 44 lks. dist.,

The sec. cor. to secs. 25 and 36 is monumented with an iron pipe $1\frac{1}{2}$ ins. in diam., from which

A Cedar 8 ins. in diam., bears S. 69° W., 34 lks. dist., mkd. CS BT.A Douglas Fir 16 ins. in diam., bears N. 39° W., 57 lks. dist., mkd. CS BT.

Thence

N. $0^{\circ} 18'$ E., bet. secs. 25 and 31.

- 1.07 The sec. cor. to secs. 30 and 31 is monumented with an iron pipe 2 ins. in diam., 10 ins. above ground, from which

A Douglas Fir 42 ins. in diam., bears N. 50° E., 48 lks. dist., chopped with axe face (original).A Black Oak 12 ins. in diam., bears S. 87° E., 56 lks. dist., mkd. CS BT

- 40.94 Point for $\frac{1}{4}$ sec. cor. of sec. 25 at proportionate distance.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from whichA Douglas Fir 22 ins. in diam., bears N. $58\frac{1}{2}^{\circ}$ W., 26 lks. dist., mkd. $\frac{1}{4}$ S25 RS404 BT.A Douglas Fir 12 ins. in diam., bears S. 30° W., 52 lks. dist., mkd. $\frac{1}{4}$ S25 RS404 BT.

- 41.57 To the $\frac{1}{4}$ sec. cor. of sec. 30 determined from the bearing tree by Gibbs, Oct. 7, 1909. Fail to find the corner stone.

A Douglas Fir 16 ins. in diam., bears S. 68° E., 9 lks. dist., chopped with mks. $\frac{1}{4}$ visible.Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing tree.A Douglas Fir 12 ins. in diam., bears N. $84\frac{1}{2}^{\circ}$ E., 46 lks. dist., mkd. $\frac{1}{4}$ S30 RS404 BT.

T. 38 S., R. 2 W.

Chains

40.06 The center $\frac{1}{4}$ sec. cor. is monumented with a capped iron pipe 1 in. in diam., flush with the surface of the ground and covered with oak leaves. No reference points, so I take bearing trees.

A White Oak 10 ins. in diam., bears N. 73° E., 9 lks. dist., mkd. C $\frac{1}{4}$ S24 RSH04 BT.

A Douglas Fir 7 ins. in diam., bears S. 46° E., 92 lks. dist., mkd. C $\frac{1}{4}$ S24 RSH04 BT.

A Douglas Fir 18 ins. in diam., bears S. $46\frac{1}{2}^{\circ}$ W., 34 lks. dist., mkd. C $\frac{1}{4}$ S24 RSH04 BT.

A White Oak 10 ins. in diam., bears N. 59° W., 32 lks. dist., mkd. C $\frac{1}{4}$ S24 RSH04 BT.

Thence

N. $0^{\circ} 14' 30''$ E., taking new measurement.

40.21 The $\frac{1}{4}$ sec. cor. of secs. 13 and 24 is monumented with a capped iron pipe 1 in. in diam., 3 ins. above ground, from which the original bearing trees.

A White Oak 22 ins. in diam., bears N. 73° W., 30 lks. dist., with partial scribe mks. visible.

A White Oak 12 ins. in diam., bears S. 35° W., 129 lks. dist., mkd. $\frac{1}{4}$ S with other mks. overgrown.

At the $\frac{1}{4}$ sec. cor. of secs. 23 and 24.

S. $89^{\circ} 39'$ E., on East and West center line of sec. 24.

40.26 To the center $\frac{1}{4}$ sec. cor. of sec. 24.

S. $89^{\circ} 48' 30''$ E., on East and West center line of sec. 24.

60.41 The center East 1/16 sec. cor. is monumented with a capped iron pipe 1 in. in diam., 12 ins. below the surface of the ground.

N. $89^{\circ} 57'$ E., on East and West center line of sec. 24.

80.57 To the $\frac{1}{4}$ sec. cor. of secs. 19 and 24 determined from the remains of the original bearing trees.

A Black Oak burned out bears S. 75° E., 91 lks. dist.,

A Black Oak stump hole with sprouts along side bears S. 75° W. 33 lks. dist.,

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RSH04, from which new bearing trees.

A Black Oak 12 ins. in diam., bears N. $55\frac{1}{2}^{\circ}$ E., 19 lks. dist., mkd. $\frac{1}{4}$ S19 RSH04 BT.

A Douglas Fir 10 ins. in diam., bears S. $40\frac{1}{2}^{\circ}$ W., 57 lks. dist., mkd. $\frac{1}{4}$ S24 RSH04 BT.

T. 38 S., R. 2 W.

Chains

20.135 Point for Southeast 1/16 sec. cor. of sec. 23.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Black Oak 12 ins. in diam., bears N. $57\frac{1}{2}^{\circ}$ E., 63 lks. dist., mkd. SE 1/16 S23 RS404 BT.

A Douglas Fir 10 ins. in diam., bears N. 42° W., $42\frac{1}{2}$ lks. dist., mkd. SE 1/16 S23 RS404 BT.

40.27 To the center South 1/16 sec. cor. of sec. 23.

At the sec. cor. of secs. 23, 24, 25 & 26.

N. $89^{\circ} 55'$ E., on true line bet. secs. 24 and 25.

20.09 Point for West 1/16 sec. cor. of secs. 24 and 25.

Set an iron pipe 3 ft. long 1 in. in diam., 15 ins. in the ground, to bedrock, mkd. RS404, from which

A White Oak 8 ins. in diam., bears N. 61° W., 11 lks. dist., mkd. W 1/16 S24 RS404 BT.

A Douglas Fir 20 ins. in diam., bears S. 11° E., 83 lks. dist., mkd. W 1/16 S25 RS404 BT.

40.18 To the $\frac{1}{4}$ sec. cor. of secs. 24 and 25 determined from the original bearing trees.

A Yellow Pine (dead) 44 ins. in diam., bears N. 38° W., 30 lks. dist., mkd $\frac{1}{4}$ S BT.

A Yellow Pine (dead) 9 ins. in diam., bears S. 8° E., 40 lks. dist., with partial scribe marks.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing trees.

A Black Oak 8 ins. in diam., bears N. $59\frac{1}{2}^{\circ}$ W., 12 lks. dist., mkd. $\frac{1}{4}$ S24 RS404 BT.

A Douglas Fir 12 ins. in diam., bears S. 11° E., 22 lks., dist., mkd. $\frac{1}{4}$ S25 RS404 BT.

Thence

N. $0^{\circ} 13'$ E., on North and South center line of sec. 24.

20.03 Point for center South 1/16 sec. cor.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which.

A Douglas Fir 16 ins. in diam., bears N. $29\frac{1}{2}^{\circ}$ E., 30 lks. dist., mkd. CS 1/16 S24 RS404 BT

A Douglas Fir 10 ins. in diam., bears S. 47° W., 34 lks. dist., mkd. CS 1/16 S24 RS404 BT.

T. 38 S., R. 2 W.

Chains

40.26 Point for the center $\frac{1}{4}$ sec. cor. at the intersection of the North and South center line of sec. 23.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 8 ins. in diam., bears N. 73° E., 14 lks. dist., mkd. C $\frac{1}{4}$ S23 RS404 BT.

A Douglas Fir 6 ins. in diam., bears S. 56° E., 10 lks. dist., mkd. C $\frac{1}{4}$ S23 RS404 BT.

A Douglas Fir 8 ins. in diam., bears S. $37\frac{1}{2}^{\circ}$ W., 22 lks. dist., mkd. C $\frac{1}{4}$ S23 RS404 BT.

A Douglas Fir 10 ins. in diam., bears N. 27° W., 8 lks. dist., mkd. C $\frac{1}{4}$ S23 RS404 BT.

80.43 To the $\frac{1}{4}$ sec. cor. of secs. 22 and 23.

At the $\frac{1}{4}$ sec. cor. on the South Boundary of sec. 23.

N. $0^{\circ} 01'$ E., on the North and South center line of sec. 23.

19.965 Point for the center South $1/16$ sec. cor.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 8 ins. in diam., bears N. 31° E., 17 lks. dist., mkd. CS $1/16$ S23 RS404 BT.

A Black Oak 10 ins. in diam., bears S. 52° E., 29 lks. dist., mkd. CS $1/16$ S23 RS404 BT.

39.93 To the center $\frac{1}{4}$ sec. cor. of sec. 23.

79.83 To the $\frac{1}{4}$ sec. cor. of secs. 14 and 23 determined from the original bearing trees.

A White Oak 18 ins. in diam., bears N. 67° E., 124 lks. dist., healed.

A Black Oak 14 ins. in diam., bears S. 15° E., 127 lks. dist., down and partly decayed with scribe marks.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing tree.

A White Oak 8 ins. in diam., bears S. 37° E., 109 lks. dist., mkd. $\frac{1}{4}$ S23 RS404 BT.

At the South $1/16$ sec. cor. of secs. 23 and 24.

N. $89^{\circ} 48'$ W., on East and West center line of the Southeast $\frac{1}{4}$ of sec. 23.

10.067 Point for CESE $1/64$ sec. cor. of sec. 23.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 10 ins. in diam., bears S. $13\frac{1}{2}^{\circ}$ E., 54 lks. dist., mkd. CESE $1/64$ S23 RS404 BT.

A Live Oak 8 ins. in diam., bears N. 14° W., 24 lks. dist., mkd. CESE $1/16$ S23 RS404 BT

3 ft.

T. 38 S., R. 2 W.

Chains

79.40 The sec. cor. of secs. 14, 15, 22 & 23 is monumented with an iron pipe 1 in. in diam., 6 ins. above the ground, mkd. T38S R2W SEC COR.

15 | 14
22 | 23
CS 1960

A Douglas Fir 7 ins. in diam., bears N. $60\frac{1}{2}^{\circ}$ E., $21\frac{1}{2}$ lks. dist., mkd. CS BT.

A Madrona 5 ins. in diam., bears S. 6° E., $19\frac{1}{2}$ lks. dist., mkd. CS BT.

A White Oak 5 ins. in diam., bears S. 66° W., $47\frac{1}{2}$ lks. dist., mkd. CS BT.

A White Oak 5 ins. in diam., bears N. $34\frac{3}{4}^{\circ}$ W., $48\frac{1}{2}$ lks. dist., mkd. CS BT.

At the sec. cor. of secs. 23, 24, 25 & 26.

N. $0^{\circ} 01'$ E., on true line bet. secs. 23 and 24.

20.165 Point for South 1/16 sec. cor. at proportionate distance.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 6 ins. in diam., bears S. 87° E., $43\frac{1}{2}$ lks. dist., mkd. S 1/16 S24 RS404 BT.

A Douglas Fir 12 ins. in diam., bears N. 19° W., $5\frac{1}{2}$ lks. dist., mkd. S 1/16 S23 RS404 BT.

40.33 To $\frac{1}{4}$ sec. cor. of secs. 23 and 24 determined from the original bearing trees

A Black Oak dead snag 12 ins. in diam., bears S. 25° W., 32 lks. dist., mkd. BT with top blaze decayed.

A Black Oak 14 ins. in diam., bears N. 42° E., 33 lks. dist., chopped.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing trees.

A Douglas Fir 12 ins. in diam., bears N. 62° W., 20 lks. dist., mkd. $\frac{1}{4}$ S23 RS404 BT.

A Douglas Fir 8 ins. in diam., bears S 49° E., 10 lks. dist., mkd. $\frac{1}{4}$ S24 RS404 BT.

Thence

S. $89^{\circ} 57'$ W., on East and West center line of sec. 23.

20.13 Point for center East 1/16 sec. cor.

A Madrona 16 ins. in diam., bears N. 7° E., 24 lks. dist., mkd. CE 1/16 S23 RS404 BT.

A Douglas Fir 26 ins. in diam., bears S 47° W., 31 lks. dist., mkd. CE 1/16 S23 RS404 BT.

T. 38 S., R. 2 W.

Chains

40.28 Point for $\frac{1}{2}$ sec. cor. of sec. 23 at proportionate distance, find no evidence of bearing trees, find the marked stone set by Gibbs in 1908 out of position as it has been disturbed by a logging operation.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which.

A Douglas Fir 6 ins. in diam., bears N. 50° E., 47 lks. dist., mkd. $\frac{1}{4}$ S23 RS404 BT.

A Douglas Fir 18 ins. in diam., bears N. $3\frac{1}{2}^{\circ}$ W., 76 lks. dist., mkd. $\frac{1}{4}$ S23 RS404 BT.

59.76 Point for West $1/16$ sec. cor. of sec. 26 only.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 18 ins. in diam., bears S. $4\frac{1}{2}^{\circ}$ E., 26 lks. dist., mkd. W $1/16$ S26 RS404 BT.

A Madrona 10 ins. in diam., bears S. $61\frac{1}{2}^{\circ}$ W., 42 lks. dist., mkd. W $1/16$ S26 RS404 BT.

80.56 To the sec. cor. of secs. 22, 23, 26 & 27, determined from the only two extant original bearing trees

A Black Oak 15 ins. in diam., bears S. 65° W., 52 lks. dist., down and decayed with partial scribe marks.

A Douglas Fir 38 ins. in diam., bears N. 60° W., 74 lks. dist., with partial scribe mks. visible in the top blaze, bottom blaze healed.

Set an iron pipe 3 ft. long 2 ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing trees

A Douglas Fir 10 ins. in diam., bears N. 2° E., 8 lks. dist., mkd. T38S R2W S23 RS404 BT.

A Douglas Fir 18 ins. in diam., bears S. 57° E., 17 lks. dist., mkd. T38S R2W S26 RS404 BT.

A Douglas Fir 12 ins. in diam., bears S. 26° W., 35 lks. dist., mkd. T38S R2W S27 RS404 BT.

Thence

N. $0^{\circ} 13'$ E., on true line bet. secs. 22 and 23.

39.70 Point for $\frac{1}{4}$ sec. cor. at proportionate distance, find no evidence of the original corner.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 8 ins. in diam., bears N. 59° W., 24 lks. dist., mkd. $\frac{1}{4}$ S22 RS404 BT.

A Douglas Fir 16 ins. in diam., bears N. 50° E., 52 lks. dist., mkd. $\frac{1}{4}$ S23 RS404 BT.

1

T. 38 S., R. 2 W.

Chains

The corner point of secs. 23, 24, 25 & 26 is determined from the only two extant original bearing trees.

A Yellow Pine 2 $\frac{1}{4}$ ins. in diam., bears S. 114° W., 13 lks. dist., with mks. 38 and 26 visible, other mks. healed.

A Black Oak 12 ins. in diam., bears N. 57° W., 6 lks. dist., with axe face, scribe mks. decayed.

Set an iron pipe 3 ft. long 2 ins. in diam., 28 ins. in the ground, mkd. RS 404, from which new bearing trees

A Douglas Fir 8 ins. in diam., bears N. $69\frac{1}{2}^{\circ}$ E., 34 lks. dist., mkd. T38S R2W S24 RS404 BT.

A Douglas Fir 1 $\frac{1}{4}$ ins. in diam., bears S. 57° E., 44 lks. dist., mkd. T38S R2W S25 RS404 BT.

A Douglas Fir 8 ins. in diam., bears N. $22\frac{1}{2}^{\circ}$ W., 65 lks. dist., mkd. T38S R2W S23 RS404 BT.

The geographic position of this corner is latitude $42^{\circ} 14' 39''$ N., and longitude $122^{\circ} 53' 46''$ W.

November 30, 1960: at this sec. cor. at 1 p.m. P.S.T.

I set off $42^{\circ} 14\frac{1}{2}'$ N., on the lat. arc; $21^{\circ} 43'$ S., on the declination arc of my Gurley solar transit, and determine a meridian. The magnetic declination observed was $19^{\circ} 30'$ E. Foresight and backsight method was used throughout this survey.

Thence

N. $89^{\circ} 34'$ W., on true line bet. secs. 23 and 26.

10.07 Point for East East 1/64 sec. cor. of sec. 23 only.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Black Oak 16 ins. in diam., bears N. $28\frac{1}{2}^{\circ}$ E., 79 lks. dist., mkd. EE 1/64 S23 RS404 BT.

A Madrona 1 $\frac{1}{4}$ ins. in diam., bears N. 55° W., 61 lks. dist., mkd. EE 1/16 S23 RS404 BT.

20.14 Point for East 1/16 sec. cor. of sec. 23 only.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 5 ins. in diam., bears N. 24° W., 6 lks. dist., mkd. E 1/16 S23 RS404 BT.

A Douglas Fir 10 ins. in diam., bears N. 10° E., 32 lks. dist., mkd. E 1/16 S23 RS404 BT.

39.84 Point for $\frac{1}{4}$ sec. cor. of sec. 26 at proportionate distance.

Set an iron pipe 3 ft. long 1 $\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas Fir 8 ins. in diam., bears S. $66\frac{1}{2}^{\circ}$ W., 6 lks. dist., mkd. $\frac{1}{4}$ S26 RS404 BT

A Douglas Fir 1 $\frac{1}{4}$ ins. in diam., bears S. $12\frac{1}{2}^{\circ}$ E., 87 lks. dist., mkd. $\frac{1}{4}$ S26 RS404 BT.

1702

TOWNSHIP 38 SOUTH, RANGE 2 WEST, WILLAMETTE MERIDIAN, OREGON

DEPENDENT RESURVEY

AND

SUBDIVISION OF SECTIONS 23, 24, 25 & 26

EXECUTED AT THE REQUEST OF J. H. BAXTER & CO.

OF

GRANTS PASS, OREGON

BY

Marvin C. Ramsey, Registered Professional Land Surveyor.

Assistants

James Goodin
John H. Hanawalt
George N. Young

Survey commenced November 30, 1960

Survey completed May 5, 1961

