

(No map accompanied this Narrative)

Route 2, Box 688A,
Grants Pass, Oregon.

September 20, 1954.

Mr. Paul B. Rynning,
County Surveyor,
Jackson County,
Court House,
Medford, Oregon.

Dear Mr. Rynning:

The $\frac{1}{4}$ sec. cor. of secs. 35 and 36, T. 32 S., R. 4 W., W. M., Oregon was rehabilitated by me at the request of Dollar and Patterson Co., Inc. of Glendale, Oregon. The detailed description of rehabilitated corner is as follows:

The point for $\frac{1}{4}$ sec. cor. of secs. 35 and 36, T. 32 S., R. 4 W., W. M., Oregon, is determined at the record bearing and distance from each of the original bearing trees, the corner stone has been displaced and is loose on the ground;

At the corner point,

Set an iron pipe, 3 ft. long, $1\frac{1}{2}$ ins. diam., 28 ins. in the ground, mkd. RS33; from which the original bearing trees:



A cedar stump, 30 ins. diam., bears N.75°E., 99 lks. dist., on which no marks remain.

A pine, 40 ins. diam., bears S.75°W., 17 lks. dist., with blaze healed.

And a new bearing tree:

A pine, 8 ins. diam., bears N.45°E., 85 lks. dist., mkd. $\frac{1}{4}$ S36 RS33 BT.

Re-set the original corner stone, mkd. $\frac{1}{4}$ on W. face, at base of iron pipe.

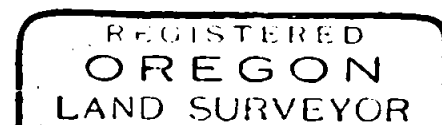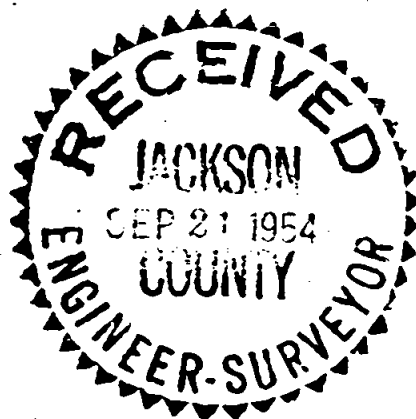

Norman D. Price

