

Edward A. McGinty, L.S.
108 King Street
Medford, Oregon

May 28, 1956

Paul Rynning, County Surveyor
Jackson County, Court House
Medford, Oregon

Subject: Re-established D.L.C. corners.

Township 37 South, Range 2 West
Northeast corner of D.L.C. 66 (Northwest corner of D.L.C. 65)


Found stone 6"X8"X12" approx. 18" deep, near the center line of Beal Lane. Also survey stake, and old spike over stone, dug along the north side of stone about three feet deep finding remains of rotten stake or post. said stone unquestionably the same as indicated on the Snowy Butte Sub-division.

Collateral evidence:

East - West fence line approx. 30 feet south (rd. record being 30')
On fence line projected south.
Checking survey of record on distance, east and west only, reasonably close. (see survey number 30 in County survey of records)

From said D.L.C.

Set 1/2 inch balt south 30.0 feet at north edge of fence.
Found 5/8 inch pin on fence line bears North 46° West 44.67 feet.

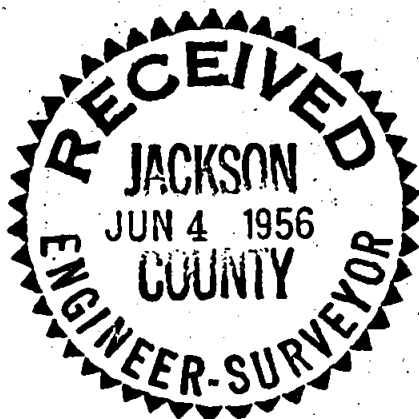

Edward A. McGinty

