




Chains

Returning to the CN 1/16 corner Sec. 6, as previously described,  
I run on a calculated bearing of N 87° 20' W for a distance  
of 28.896 chains to the N 1/16 corner between Secs. 6 and 1,  
as previously described.

I hereby certify that the foregoing is a true and accurate description  
of the resurvey and partial subdivision of Section 31, Township 39 South,  
Range 4 East, and Section 6, Township 40 South, Range 4 East, Willamette  
Meridian.

*A. L. Moore*  
Woods Engineer

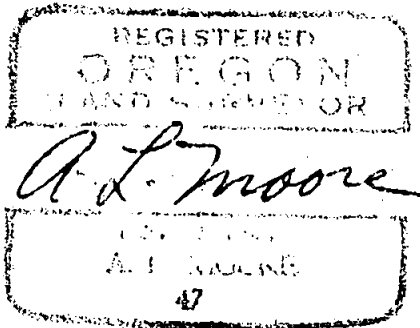

G. V. Nygren  
bls  
5/24/65

## Chains

- A W nail in a 12 inch Ponderosa Pine bears N 61° W, 104.4 links.
- A W nail in a 14 inch Ponderosa Pine bears S 39° W, 61.5 links.
- 30.412 To the  $\frac{1}{2}$  corner between Secs. 6 and 7, which is  $\frac{3}{4}$  inch cupro-nickle pipe in stone mound from which:
- A W nail in a 10 inch Incense Cedar BT bears S 55 $\frac{1}{2}$ °W, 40.8 links.
- A W nail in a 14 inch Incense Cedar BT bears S 67 $\frac{1}{2}$ ° E, 7.3 links.
- 
- 00.000 Returning to the NE corner Sec. 6, which is a closing corner common to Secs. 5 and 6 previously described, I run on a calculated bearing of S 00° 21' E on true line between Sec. 5 and 6.
- 43.480 Set a 4 x 4 inch post in stone mound for the  $\frac{1}{2}$  corner between Secs. 5 and 6. After diligent search I determine this corner to be lost and reset it by proportionate distance between the closing Sec. corner to the North and the standard Sec. corner to the South, from which:
- A W nail in a 30 inch Ponderosa Pine bears N 30° W, 396.0 links.
- A W nail in a 24 inch Ponderosa Pine bears N 35° E, 337.0 links.
- 83.964 To the Sec. corner for Secs. 5, 6, 7 and 8 which is a 1 inch iron pipe in a stone mound at fence corner with bearing trees (not recorded) and cruiser marks.

---

Returning to the  $\frac{1}{2}$  corner between Secs. 5 and 6, as previously described, I run on a calculated bearing of N 87° 29' W for a distance of 61.002 chs. and set a 4 x 4 inch post and a 1 inch iron pipe in a stone mound for the CW 1/16 corner from which:

- A W nail in a 26 inch Sugar Pine bears S 78° E, 30.7 links.
- A W nail in a 19 inch Ponderosa Pine bears S 64° W, 24.3 links.
- Thence I continue on same bearing for a distance of 9.145 chs. to the  $\frac{1}{2}$  corner between Secs. 6 and 12, as previously described.

---

Returning to the  $\frac{1}{2}$  corner between Secs. 6 and 7, as previously described, I run on a calculated bearing of N 00° 30' W for a distance of 60.835 chs. and set 4 x 4 inch post and iron pipe in a stone mound for the CN 1/16 corner from which:

- A W nail in a 10 inch Ponderosa Pine bears N 3 $\frac{1}{2}$ ° W, 21.1 links.
- A W nail in a 12 inch Ponderosa Pine bears S 18° W, 38.7 links.
- Thence I continue on same bearing for a distance of 21.571 chs. to the north closing  $\frac{1}{2}$  corner Sec. 6, as previously described.

---

Returning to the CW 1/16 corner Sec. 6, as previously described, I run on a calculated bearing of S 00° 45' 30" E for a distance of 40.382 chains to the W 1/16 corner between Secs. 6 and 7, as previously described.

Chains

Thence I continue on same bearing for a distance of 20.070 chains to the W 1/16 corner on the south line Sec. 31, as previously described.

Returning to the CS 1/16 corner Sec. 31, as previously described, I run on a calculated bearing of N 89° 48' W for a distance of 20.217 chains to the SW 1/16 corner Sec. 31, as previously described.

---

Returning to the S 1/16 corner of SE $\frac{1}{4}$  of Sec. 31, as previously described, I run on a calculated bearing of N 00° 11' E for a distance of 40.254 chains to the CE 1/16, as previously described.

---

- 00.000 Returning to the Township corner common to T. 39 S, T. 40 S, R 3 E and R 4 E, as previously described, I run S 01° 10' W (solar bearing) on a true line between Secs. 1 and 6.
- 20.375 Set a 4 x 4 inch post in stone mound for the N 1/16 corner between Secs. 1 and 6 from which:
- A W nail in a 10 inch Incense Cedar bears S 72 $\frac{1}{2}$ ° E, 84.8 links.
  - A W nail in a 12 inch Incense Cedar bears S 74 $\frac{1}{2}$ ° W, 31.0 links.
- 40.750 To the  $\frac{1}{2}$  corner between Secs. 1 and 6, which is 3/4" cupronickle pipe in a stone mound from which:
- A W nail in a 24 inch Juniper BT bears N 73° E, 10.4 links.
  - A W nail in an 18 inch Juniper BT bears S 60 $\frac{1}{2}$ ° E, 37.3 links.
  - A W nail in a 6 inch Incense Cedar bears S 3° E, 29.6 links.
- 00.000 Thence I run on a calculated bearing of 300° 48' W between Secs. 1 and 6.
- 20.131 Set a 4 x 4 inch post in stone mound for the S 1/16 corner between Secs. 1 and 6, from which:
- A W nail in an 8 inch White Fir bears S 63° E, 25.4 links.
  - A W nail in an 8 inch Douglas Fir bears S 63 $\frac{1}{2}$ ° W, 25.6 links.
- 40.261 To the Sec. corner for Secs. 1 and 12, T. 40 S, R. 3 E and Secs. 6 and 7, T. 40 S., R. 4 E., which is a 1 inch iron pipe in a stone mound from which:
- A W nail in a 28 inch Incense Cedar BT bears N 45° E, 39.0 links.
  - A W nail in a 20 inch Ponderosa Pine bears S 8 $\frac{1}{2}$ ° E, 51.8 links.
  - A W nail in a 10 inch Douglas Fir bears S 23 $\frac{1}{2}$ ° W, 43.1 links.
  - A W nail in a 16 inch Douglas Fir bears N 28° W, 25.4 links.
- 00.000 Thence I run on a calculated bearing of S 87° 05' E on true line between Secs. 6 and 7.
- 10.246 Set 1 inch iron pipe in stone mound for the W 1/16 corner between Secs. 6 and 7. Corner set proportionately between Sec. corner to the West and  $\frac{1}{2}$  corner to the east, from which:

Chains A W nail in a 4 inch White Fir bears N 75° E, 31.5 links.

A W nail in a 24 inch Douglas Fir bears S 52° W, 27.3 links.

A W nail in a 10 inch White Fir bears N 22° W, 62.5 links.

Thence I continued on same bearing for a distance of 40.354 chains and set a 4 x 4 inch post in a stone mound for the CE 1/16 corner from which:

A W nail in an 8 inch Douglas Fir bears N 63° E, 30.5 links.

A W nail in a 10 inch Douglas Fir bears N 24° W, 26.0 links.

Thence I continued on same bearing for a distance of 20.244 chains to the E ½ corner Sec. 31, as previously described.

---

Returning to the S ½ Sec. 31, as previously described, I run on a calculated bearing of N 00° 17' E for a distance of 20.098 chains and set a 4 x 4 inch post in a stone mound for the CS 1/16 corner Sec. 31 from which:

A W nail in an 18 inch White Fir bears N 8° E, 47.9 links.

A W nail in a 16 inch Douglas Fir bears S 64° E, 44.1 links.

Thence I continue on same bearing for a distance of 40.176 chains and set 4 x 4 inch post in a stone mound for the CN 1/16 corner Sec. 31, from which:

A W nail in an 8 inch Douglas Fir bears N 42° W, 16.4 links.

A W nail in a 6 inch Douglas Fir bears N 75° E, 16.4 links.

Thence I continue on same bearing for a distance of 20.077 chains to the N ½ Sec. 31, as previously described.

---

Returning to the CE 1/16 corner Sec. 31, as previously described, I run on a calculated bearing of N 00° 09' E for a distance of 20.058 chains and set a 4 x 4 inch post in a stone mound for the NE 1/16 corner of Sec. 31 from which:

A W nail in an 8 inch White Fir bears N 84° E, 18.0 links.

A W nail in a 12 inch White Fir bears S 12° W, 20.5 links.

Thence I continue on same bearing for a distance 20.058 chains to the E 1/16 corner between Sec. 30 and 31, as previously described.

---

Returning to the CN 1/16 Sec. 31, as previously described, I run on a calculated bearing of S 89° 49' 15" E for a distance of 20.199 chains to the NE 1/16 corner Sec. 31, as previously described.

---

Returning to the CW 1/16 corner Sec. 31, as previously described, I run on a calculated bearing of S 00° 35' W for a distance of 20.071 chains and set a 4 x 4 inch post in a stone mound for the SW 1/16 corner Sec. 31 from which:

A W nail in an 8 inch Douglas Fir bears S 54° E, 25.5 links.

A W nail in an 8 inch White Oak bears N 46° E, 14.2 links.

Chains

- A W nail in a 10 inch Juniper BT bears S 21° W, 117.3 links.
- A W nail in an 11 inch Juniper BT bears S 52° E, 53.7 links.
- Thence I run on a calculated bearing of N 00° 01' E. on true line between Secs. 31 and 32.
- 40.078 To the section corner for Secs. 29, 30, 31 and 32, which is a 1 inch iron pipe in a stone mound from which:
- A W nail in a 10 inch White Fir bears N 29° W, 59.9 links.
- A W nail in a 10 inch White Fir bears N 82° E 27.7 links.
- A W nail in a 10 inch White Fir bears S 33° E, 67.3 links.
- A W nail in a 16 inch Ponderosa Pine bears S 45° W, 3.0 links.
- A BT in NW Quadrant is dead and down.
- A BT in SE Quadrant is standing snag.
- 00.000 Thence I run on a calculated bearing of N 89° 46' W on true line between Secs. 30 and 31.
- 20.154 Set 1 inch iron pipe in a stone mound at the proportionate distance for the E 1/16 corner between Secs. 30 and 31 from which:
- A W nail in a 14 inch White Fir bears N 52° W, 24.7 links.
- A W nail in a 10 inch White Fir bears N 53½°E, 29.2 links.
- 40.309 Set a 1 inch iron pipe in a stone mound for N ¼ Sec. 31. After diligent search I find no evidence of the original corner and determine it to be lost and reset it by proportionate distance between the standard section corner to the east and the standard section corner to the west. Referenced as follows:
- A W nail in a 10 inch White Fir bears S 34° W, 37.7 links.
- A W nail in a 6 inch Incense Cedar bears N 20° W, 37.1 links.
- 81.152 To the NW corner Sec. 31 which is a 3/4 inch cupronickle pipe in a stone mound from which:
- A W nail in a 27 inch Douglas Fir BT bears N 64° W, 65.0 links.
- A W nail in a 16 inch Douglas Fir BT bears S 42° W, 50.0 links.
- A W nail in a 4 inch White Fir bears N 35° E, 2.8 links.
- 
- 00.000 Returning to the SW corner Sec. 31, as previously described I run on a calculated bearing of N 00° 31' E on a true line between Secs. 31 and 36.
- 40.087 To the ¼ corner between Secs. 31 and 36, which is a 3/4 inch cupronickle pipe in a stone mound from which:
- A W nail in a 39 inch Ponderosa Pine BT bears N 67° W, 19.5 links.
- A W nail in a 30 inch Ponderosa Pine BT bears N 36° E, 20.5 links.
- Thence from the ¼ corner between 31 and 36 I run on a calculated bearing of S 89° 52' 30" E, a distance of 20.374 chains and set a 1 inch iron pipe in the east track of the Corral Creek Road 4 inches below the road surface for the CW 1/16 corner from which:

CHAINS

- 00.000 Commencing at the Township corner common to T. 39 S., and T. 40 S., R. 3 E. and R. 4 E., which is a 3/4 inch cupronickle pipe in a stone mound from which:
- A W nail in a 42" Incense Cedar BT bears N 1° E, 110.6 links.
- Thence I run S 89° 43' E (solar bearing) on a true line between Sec. 31 and 6.
- 20.323 Set a 4 x 4 inch post in stone mound at the proportionate distance for the W 1/16 corner on the south line of Sec. 31 from which:
- A W nail in an 8 inch Ponderosa Pine bears S 21° E, 13.5 links.
- A W nail in an 8 inch Ponderosa Pine bears N 62° W, 12.3 links.
- 28.269 Set brass cap marked N 1/2 S. 6, T. 40 S., R. 4 E., W. M. R.L.S. 47 in stone mound at the proportionate distance for the N 1/2 of Sec. 6 from which:
- A W nail in an 8 inch Ponderosa Pine bears N 52° W, 25.9 links.
- A W nail in a 10 inch White Fir bears S 55° W, 37.3 links.
- 40.645 Set brass cap marked S 1/2 S. 31, T. 39 S., R. 4 E., W. M., R.L.S. in stone mound. After diligent search I find no evidence of the original corner and determine it to be lost and reset it by proportionate distance between the standard Sec. corner to the West and the standard Sec. corner to the East. Referenced as follows:
- A W nail in a 10 inch Red Fir bears S 61° W, 31.0 links.
- A W nail in a 6 inch Incense Cedar bears N 71° W, 9.8 links.
- 60.967 Set a 4 x 4 inch post in stone mound at the proportionate distance for the E 1/16 corner on the south line Sec. 31 from which:
- A W nail in a 6 inch Ponderosa Pine bears N 7° E, 48.9 links.
- A W nail in a 14 inch Ponderosa Pine bears S 65° E, 57.9 links.
- 68.983 To the closing Sec. corner common to Sections 5 and 6, which is a 1 inch iron pipe in a stone mound from which:
- A W nail in a 26 inch Ponderosa Pine BT bears S 23° E, 134.7 links.
- A W nail in a 14 inch White Oak BT bears S 68° W, 160.0 links.
- Thence I continued running S 89° 43' E on true line between Secs. 31 and 5.
- 81.290 To the SE corner Sec. 31 which is a 3/4 inch cupronickle pipe in a stone mound from which:
- A W nail in an 8 inch Ponderosa Pine bears N 29° E, 7.9 links.
- A W nail in a 10 inch Ponderosa Pine bears N 35° W, 10.6 links.
- A fence corner post bears N 73° E, 17.4 links.
- A BT in the SW Quadrant is dead and down.
- 00.000 Thence I run on a calculated bearing of N 00° 04' E on a true line between Secs. 31 and 32.
- 40.310 To the 1/2 corner between Secs. 31 and 32, which is a 4 x 4 inch post in a stone mound from which:

2801

TOWNSHIP 39 AND 40 SOUTH, RANGE 4 EAST, WILLIAMETTE MERIDIAN, OREGON

DEPENDENT RESURVEY AND SUBDIVISION OF

SEC. 31, T. 39 S., R. 4 E and SEC. 6, T. 40 S., R. 4 E.

EXECUTED AT THE REQUEST

OF


WEYERHAEUSER COMPANY  
WOOD PRODUCTS DIVISION  
KLAMATH FALLS, OREGON

BY

G. V. NYGREN, UNDER THE DIRECT SUPERVISION

OF

A. L. MOORE, REGISTERED OREGON LAND SURVEYOR NO. 47

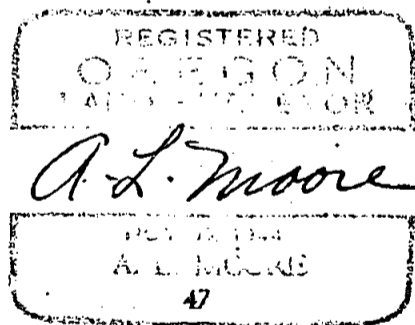

SURVEY COMMENCED APRIL 13, 1964

SURVEY COMPLETED MAY 18, 1964