

T.36S, R.4W., W.M., JACKSON COUNTY, OREGON
DEPENDENT RESURVEY AND SUBDIVISION OF SECTION 34 AND PART OF D.L.C. 41

Scale: 1 inch = 10 chains = 1320 feet

Mean Magnetic Declination $19^{\circ} 15'$ East

The bearings of all lines are referred to the true meridian determined by solar observation

○ = Corner Occupied and Monumented

— Lines Surveyed


- - - Lines Not Retraced

Survey executed October 8 - November 8, 1965
for Carl Peterson of Rogue River, Oregon



Fd.

N^o

2
2.
2.
3

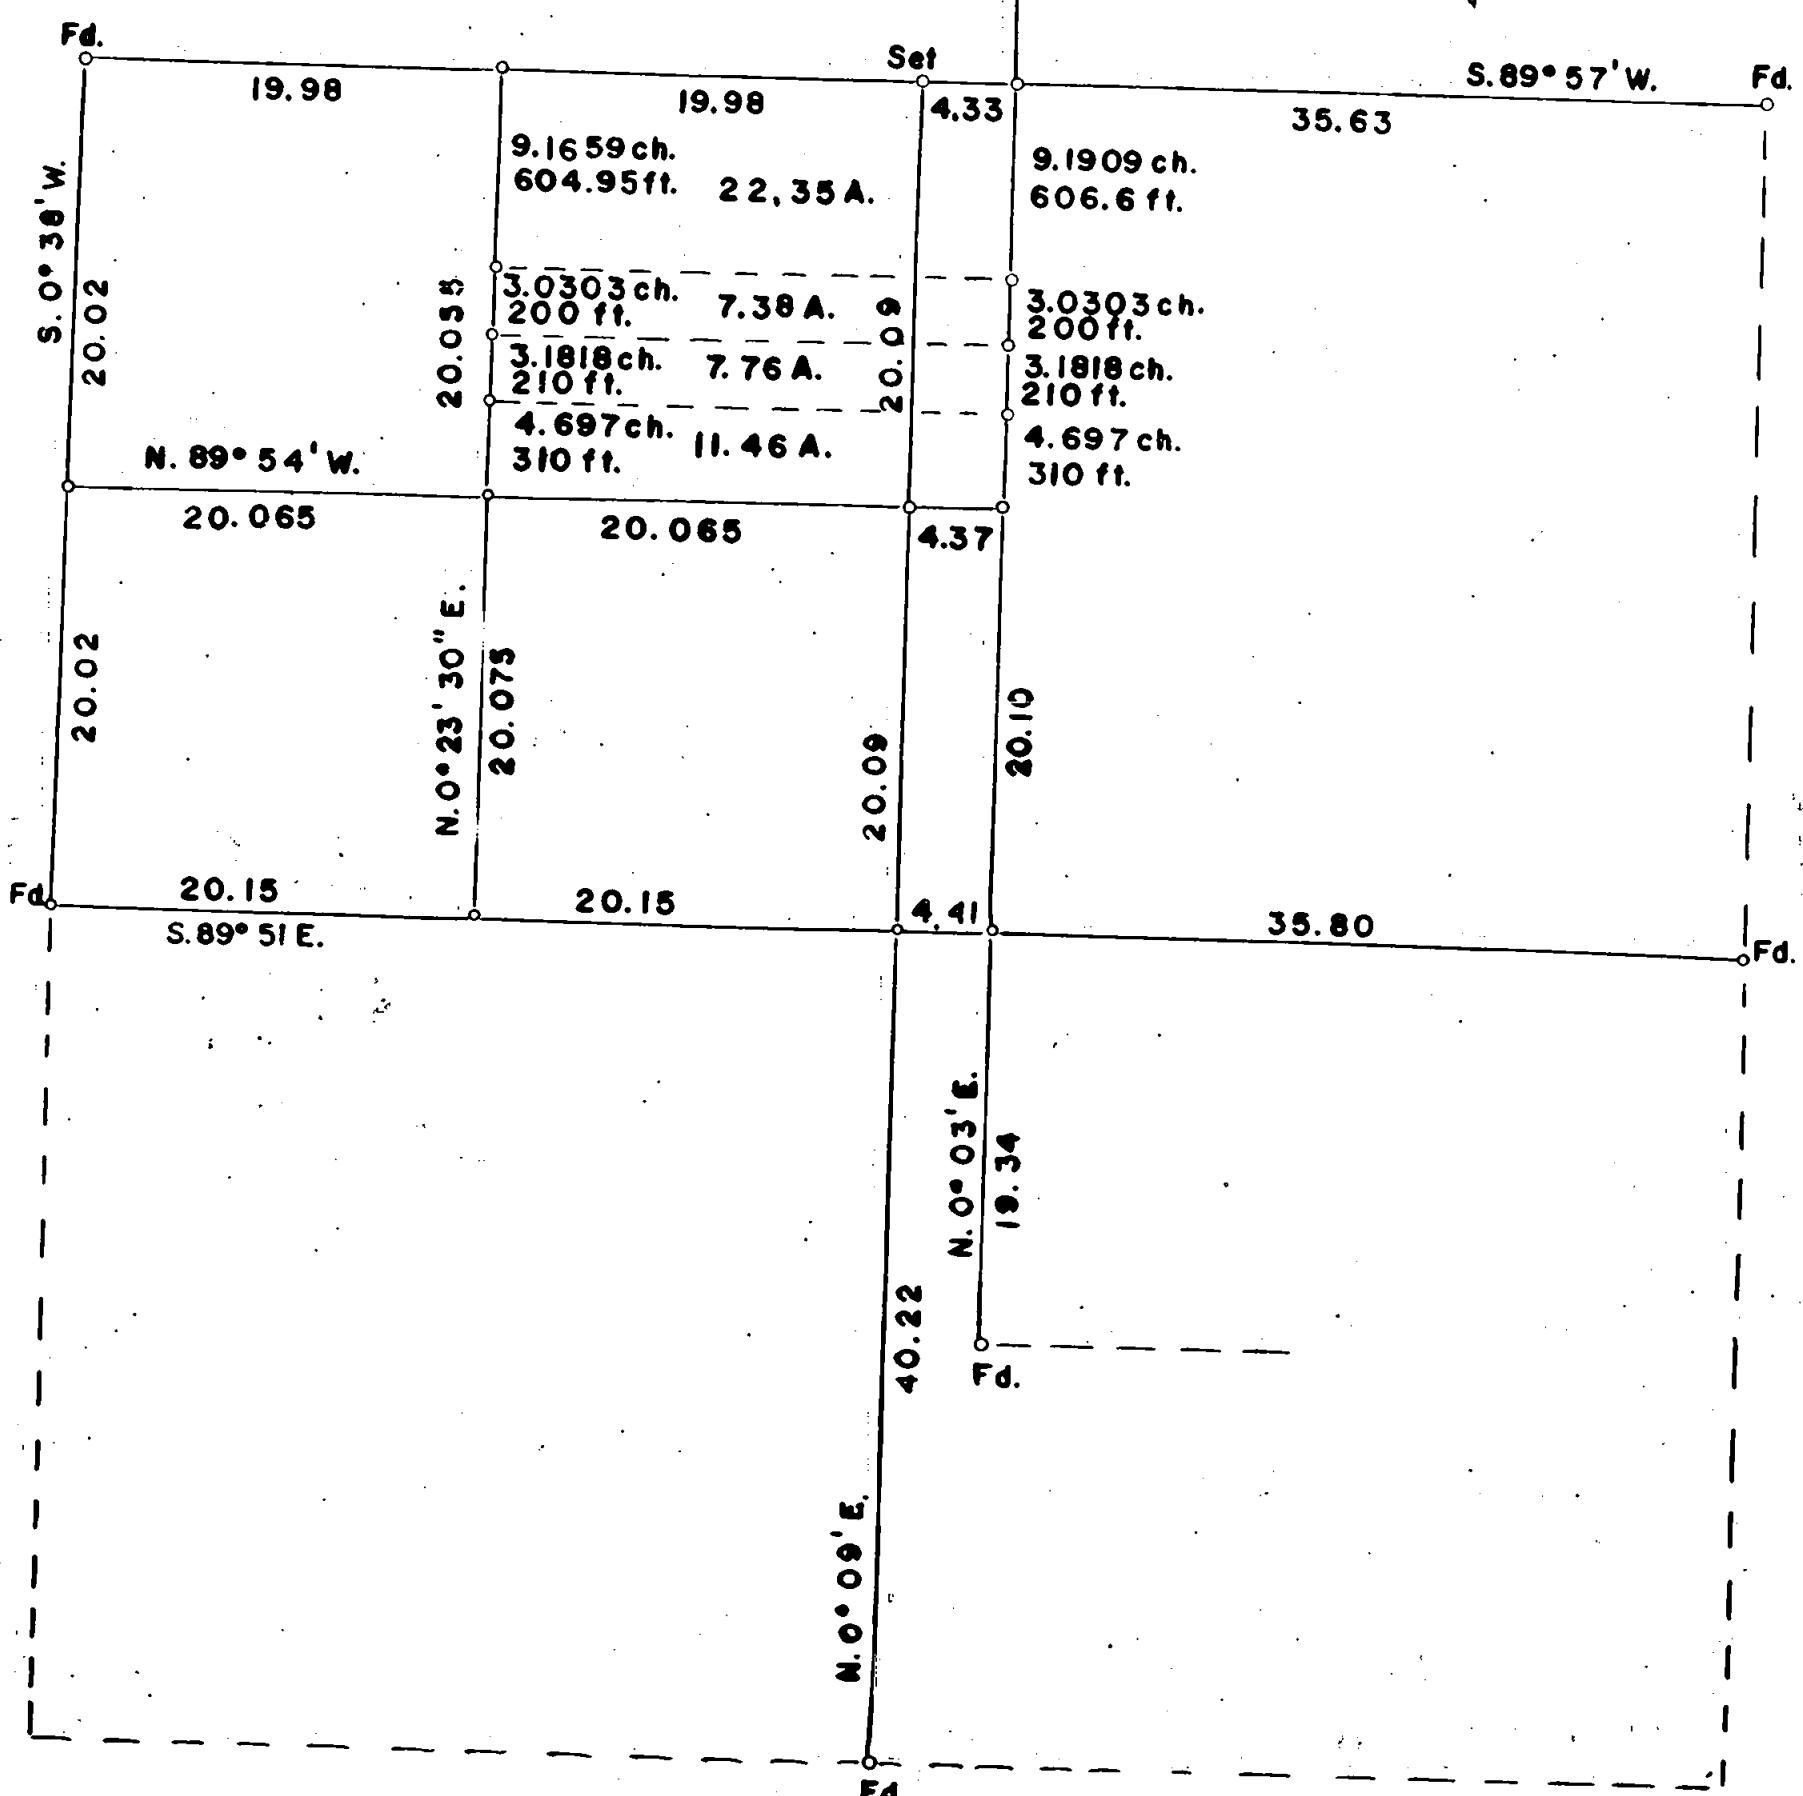

I hereby certify that the survey represented by this plat is executed in conformity with the Laws of the State of Oregon

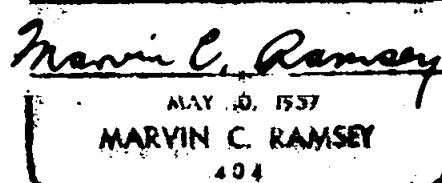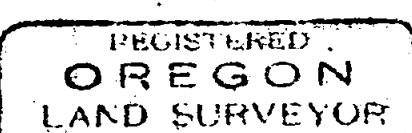

Chains

A black oak 24 ins. in diam., bears S. 82° W., 240 lks. dist., mkd. T36S R4W S34 RS404 BT

S. $89^{\circ} 57'$ W. on true line between sections 27 and 34.

35.63 To the West line of Donation Land Claim 41

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A madrona 10 ins. in diam., bears S. 17° W., 48 lks. dist., mkd. Lot 5 S 34 RS404 BT

A yellow pine 8 ins. in diam., bears N. 56° W., 5 lks. dist., mkd. Lot 14 S 27 RS404 BT

39.96 Point for the $\frac{1}{4}$ section corner at proportionate distance.

All the evidence of this corner has been dozed out by the construction of a fire line.

Set an iron pipe 3 ft. long $1\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which

A madrona 6 ins. in diam., bears N. 4° E., 43 lks. dist., mkd. $\frac{1}{4}$ S 27 RS404 BT

A madrona 8 ins. in diam., bears S. 19° E., 40 lks. dist., mkd. $\frac{1}{4}$ S 34 RS404 BT

59.94 Point for the West 1/16 section corner at proportionate dist.

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas fir 22 ins. in diam., bears S. 19° E., 27 lks. dist., mkd. W 1/16 S 34 RS404 BT

A Douglas fir 20 ins. in diam., bears N. 87° W., 50 lks. dist., mkd. W 1/16 S 27 RS404 BT

79.92 To the section corner of sections 27, 28, 33 and 34 which I determine from the original bearing trees

A black oak 12 ins. in diam., bears N. 73° E. 19 lks. dist., with axe mks., scribe mks. obliterated from decay.

A black oak 22 ins. in diam., bears S. 11° E., 24 lks. dist., healed.

A yellow pine dead snag 20 ins. in diam., bears S. 18° W., 78 lks. dist., with partial scribe mks. exposed.

A black oak 20 ins. in diam., bears N. 51° W., 68 lks. dist., open with negative on the slab.

Set an iron pipe 3 ft. long 2 ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing trees

A sugar pine 38 ins. in diam., bears N. 57° E., 45 lks. dist., mkd. T36S R4W S27 RS404 BT

A black oak 16 ins. in diam., bears S. 73° W., 52 lks. dist., mkd. T36S R4W S33 RS404 BT

A yellow pine 20 ins. in diam., bears N. 29° W., 39 lks. dist., mkd. T36S R4W S28 RS404 BT

5
T. 36 S., R. 4 W.

Chains

New bearing trees

A Douglas fir 10 ins. in diam., bears N. 30° E., 27 $\frac{1}{2}$ lks.
dist., mkd. 7 DLC 41 RS404 BT

A Douglas fir 16 ins. in diam., bears S. 38° W., 27 lks.
dist., mkd. 7 DLC 41 RS404 BT

N. $0^{\circ} 03'$ E., on the West boundary of D. L. C. 41

19.34 To the corner of lots 3 and 4.

39.44 To the corner of lots 4 and 5.

Set an iron pipe 3 ft. long 1 in. in diam., 3 ins. below the
surface of the road bed, from which

A white oak 7 ins. in diam., bears S. 74° W., 20 lks.
dist., mkd. Lot 4 S 34 RS404 BT

44.137 Set an iron pipe 3 ft. long 1 in. in diam., 3 ins. below the
surface of the road bed from which an iron pipe 3/4 ins.
in diam., bears West 15.15 lks. dist.

47.3188 Set an iron pipe 3 ft. long 1 in. in diam., 3 ins. below the
surface of the road bed from which an iron pipe 3/4 ins.
in diam., bears West 15.15 lks. dist.

50.3491 Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the
ground, from which an iron pipe 3/4 ins. in diam., bears
West 15.15 lks. dist.

59.54 To the corner of lots 5 and 14.

91.75 To corner number 6 of Donation Land Claim 41, determined from
the only extant original bearing tree



A yellow pine 34 ins. in diam., bears S. 5° W., 325 lks.
dist., down with scribe mkd. BT

Set an iron pipe 3 ft. long 1 $\frac{1}{2}$ ins. in diam., 28 ins. in the
ground, mkd. RS404, from which new bearing trees

A black oak 10 ins. in diam., bears S. $4\frac{1}{2}^{\circ}$ W., 331 lks.
dist., mkd. 6 DLC 41 RS404 BT

A yellow pine 38 ins. in diam., bears N. $83^{\circ} 20'$ W., 472 lks.
dist., mkd. 6 DLC 41 RS404 BT

I hereby certify that the bearings of all lines recorded
in this survey were determined by solar observations
and that the survey described in the foregoing field
notes was executed in conformity with the laws of the
State of Oregon.

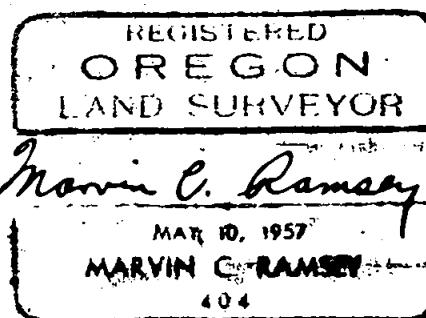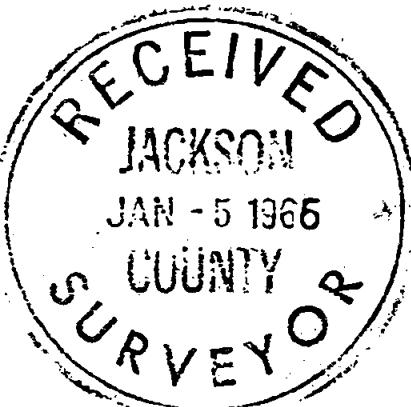

Chains

Set an iron pipe 3 ft. long 1 $\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which new bearing trees

A white oak 12 ins. in diam., bears N. 76° E., 72 lks. dist., mkd. § S 35 RS404 BT

A white oak 8 ins. in diam., bears N. 14° W., 39 lks. dist., mkd. § S 34 RS404 BT

Return to the center West 1/16 section corner

Thence N. 0° 23' 30" E., on the North and South center line of the Northwest quarter

20.075 Point for the Northwest 1/16 section corner at the intersection of the East and West center line of the Northwest quarter

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A sugar pine 22 ins. in diam., bears N. 46° E., 38.5 lks. dist., mkd. NW 1/16 S 34 RS404 BT

A Douglas fir 24 ins. in diam., bears S. 76° W., 36 lks. dist., mkd. NW 1/16 S 34 RS404 BT

24.772 Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A maple 8 ins. in diam., bears S. 62 $\frac{1}{2}$ ° E., 51 $\frac{1}{2}$ lks. dist., mkd. RS404 BT

A Douglas fir 5 ins. in diam., bears S. 11 $\frac{1}{2}$ ° W., 19 $\frac{1}{2}$ lks. dist., mkd. RS404 BT

27.9538 Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas fir 14 ins. in diam., bears N. 80° E., 32 $\frac{1}{2}$ lks. dist., mkd. RS404 BT

A Douglas fir 16 ins. in diam., bears S. 34° W., 11 $\frac{1}{2}$ lks. dist., mkd. RS404 BT

30.9841 Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A Douglas fir 16 ins. in diam., bears S. 54° E., 27 lks. dist., mkd. RS404 BT

A madrona 6 ins. in diam., bears S. 69° W., 21 lks. dist., mkd. RS404 BT

40.15 To the West 1/16 section corner of sections 27 and 34.

Corner number 7 of Donation Land Claim 41 is monumented with an iron pipe 1 $\frac{1}{2}$ ins. in diam., 8 ins. above the ground firmly set by C. Z. Boyden from which the original bearing trees

A black oak 18 ins. in diam., bears N. 80° E., 20 lks. dist., badly decayed.

A black oak 20 ins. in diam., bears N. 64° W., 23 lks. dist., with top blaze decayed and bottom blaze healed.

A black oak 28 ins. in diam., bears N. 7 $\frac{1}{2}$ ° E., 72 lks. dist., down with partial scribe mks. by C. Z. Boyden dated February 17, 1928

Chains

S. $0^{\circ} 38'$ W., on true line between sections 33 and 34

20.02 Point for the North 1/16 section corner.

Set an iron pipe 3 ft. long 1 ins. in diam., 28 ins. in the ground, mkd. RS404 from which

A Douglas fir 8 ins. in diam., bears S. 80° E., 11 lks. dist., mkd. N 1/16 S 34 RS404 BT

A Douglas fir 6 ins. in diam., bears S. 4° W., 26 lks. dist., mkd. N 1/16 S 33 RS404 BT

40.04 To the $\frac{1}{4}$ section corner determined from the original bearing trees

A Douglas fir 28 ins. in diam., bears N. 5° E., 42 lks. dist., I open and find mks., $\frac{1}{2}$ S.

A Douglas fir 40 ins. in diam., bears S. 47° W., 10 lks. dist., down and partly decayed.

Set an iron pipe 3 ft. long 1 $\frac{1}{2}$ ins. in diam., 28 ins. in the ground, mkd. RS404, from which a new bearing tree

A Douglas fir 22 ins. in diam., bears N. 39° W., 113 lks. mkd. 1/4 S 33 RS404 BT

Thence S. $89^{\circ} 51'$ E., on the East and West center line of section 34

20.15 Point for the center West 1/16 section corner

Set an iron pipe 3 ft. long 1 in. in diam., 12 ins. in the ground, to bedrock, mkd. RS404, with a mound of stone to top, from which

A Douglas fir 16 ins. in diam., bears N. 15° E., 60 lks. dist., mkd. CW 1/16 S 34 RS404 BT

A Douglas fir 26 ins. in diam., bears S. $77\frac{1}{2}^{\circ}$ E., 46 lks. dist., mkd. CW 1/16 S 34 RS404 BT

40.30 To the center $\frac{1}{4}$ section corner at the intersection of the North and South center line

44.71 To the West line of D. L. C. 41

Set an iron pipe 3 ft. long 1 in. in diam., 3 ins. below the surface of the road bed, from which

A black oak 6 ins. in diam., bears S. 84° W., 32 lks. dist., mkd. Lot 3 S 34 RS404 BT

A yellow pine 7 ins. in diam., bears N. 81° W., 54 lks. dist., mkd. Lot 4 S 34 RS404 BT

80.51 To the $\frac{1}{4}$ section corner determined from the bearing trees by C. Z. Boyden, dated November 18, 1927.

A dead white oak 18 ins. in diam., bears S. 82° E., 47 lks. dist., mkd. C S BT

A black oak 20 ins. in diam., bears S. 70° W., 56 lks. dist., with axe face, mks. destroyed by fire.

1
T. 36 S., R. 4 W.

Chains

The $\frac{1}{4}$ section corner of sections 3 and 34 T. 36 and 37 S., R. 4 W. is monumented and witnessed as described by survey number 2662.

The geographic position of this corner is latitude $42^{\circ} 23' 28''$ N., and longitude $123^{\circ} 09' 35''$ W.

October 8, 1965: at this corner at 8 a.m., P. S. T., I set off $42^{\circ} 23\frac{1}{2}'$ N. on the latitude arc; $5^{\circ} 55'$ S., on the declination arc of my Gurley solar transit and determine a meridian with the solar attachment. The magnetic declination observed was $18^{\circ} 30'$ E. Foresight and backsight method was used throughout this survey.

N. $0^{\circ} 09'$ E. on the North and South center line of section 34.

40.22 Point for the center $\frac{1}{4}$ section corner at the intersection of the East and West center line

Set an iron pipe 3 ft. long 1 $\frac{1}{2}$ ins. in diam., 20 ins. in the ground, mkd. RS404, from which

A yellow pine 14 ins. in diam., bears N. 3° E., 23 lks. dist., mkd. C $\frac{1}{4}$ S 34 RS404 BT

A white oak 6 ins. in diam., bears S. 57° E., 18 lks. dist., mkd. C $\frac{1}{4}$ S 34 RS404 BT

A white oak 6 ins. in diam., bears S. 36° W., 26 lks. dist., mkd. C $\frac{1}{4}$ S 34 RS404 BT

A white oak 7 ins. in diam., bears N. 72° W., 57 lks. dist., mkd. C $\frac{1}{4}$ S 34 RS404 BT

60.36 Point for the center North 1/16 section corner

Set an iron pipe 3 ft. long 1 in. in diam., 28 ins. in the ground, mkd. RS404, from which

A white oak 10 ins. in diam., bears S. 6° E., 181 lks. dist., mkd. CN 1/16 S 34 RS404 BT

A white oak 18 ins. in diam., bears S. 30° W., 153 lks. dist., mkd. CN 1/16 S 34 RS404 BT

80.50 To the $\frac{1}{4}$ section corner of sections 27 and 34.

The section corner of sections 26, 27, 34 and 35 was re-established by C. Z. Boyden, dated November 22, 1927. I find the following evidence.

An iron pipe 2 inches in diam., flush with the ground, from which

A locust sawed stump 24 ins. in diam., bears N. $29^{\circ} 40'$ E., 181 lks. distance.

An iron bar 1 in. in diam., flush with the ground, bears S. $37^{\circ} 40'$ E., 46.3 lks. distance, near Northeast corner of a barn

The southwest bearing tree is not found.

A white oak 24 ins. in diam., bears N. $58^{\circ} 55'$ W., 290 lks. distance, with blaze healed.

New bearing trees

A locust 12 ins. in diam., bears N. 30° E., 172 lks. distance unmarked.

2955

TOWNSHIP 36 SOUTH, RANGE 4 WEST, W. M., JACKSON COUNTY, OREGON
DEPENDENT RESURVEY AND SUBDIVISION OF SECTION 34 AND PART OF
DONATION LAND CLAIM 41

EXECUTED AT THE REQUEST OF CARL PETERSON
OF
ROGUE RIVER, OREGON
BY

Marvin C. Ramsey, Registered Professional Land Surveyor

Assistants

Paul E. Jonas
Roger C. Ramsey

Survey commenced October 8, 1965

Survey completed November 8, 1965