

SCALE: 1" = 500'

**BASIS OF BEARINGS**

1. SUBDIVISION OF SECTION 2 - SOLAR OBSERVATIONS
2. SUBDIVISION OF THE SW 1/4 OF SECTION 11 - BEARING ON THE SOUTH BOUNDARY OF SECTION 11 PER FILED SURVEY No. 7365

**LEGEND**

- G.R. = GOVERNMENT RECORD
- ⊙ - FOUND 1" GALV. IRON PIPE WITH 2 1/2" BR. CAP -- COUNTY SURVEYOR
  - ⊙ - FOUND 1" GALV. IRON PIPE WITH 2 1/2" EXPANDER FILLED WITH POT METAL -- COUNTY SURVEYOR
  - - FOUND 5/8" REBAR WITH 1 1/2" ALUM. CAP SET ON FILED SURVEY No. 7365
  - - SET 3/4" X 24" GALV. IRON PIPE WITH 2" BR. CAP MARKED AS SHOWN IN THE NARRATIVE

**SURVEY BY**

GARY D. KAISER  
513 NORTH ROYAL AVE.  
EAGLE POINT, OREGON

**DATE**

AUGUST 28, 1984

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gary D. Kaiser*

OREGON  
JULY 16, 1967  
GARY D. KAISER  
No. 802

**\*\* RECEIVED \*\***  
Date: 8/30/84 By: SK  
This survey consists of:  
3 sheet(s) map  
3 parts, non-ative  
JACKSON COUNTY  
SURVEYOR

SURVEY FOR  
**BOISE CASCADE CORP.**  
P.O. BOX 100  
MEDFORD, OREGON

LOCATED IN SECTIONS 2 & 11,  
T. 35 S., R. 1 E., W.M.  
JACKSON COUNTY, OREGON

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250

FOR: Boise Cascade Corp.  
P.O. Box 100  
Medford, Oregon 97501

BY: Gary D. Kaiser  
513 North Royal Avenue  
Eagle Point, Oregon 97524

DATE: August 28, 1984

LOCATION: Sections 2 and 11, T.35 S., R. 1E., W.M.,  
Jackson County, Oregon.

- BASIS OF BEARINGS: 1. Subdivision of Section 2 = solar observations.  
2. Subdivision of the SW 1/4 of Section 11 = bearing on the South boundary of Section 11 per Filed Survey No. 7365.

- PURPOSE: 1. To monument and reference the Northwest corner, North one-sixteenth corner on the West boundary, North one-sixteenth corner on the East boundary and the center-North one-sixteenth corner all in Section 2. The Northwest corner and the North quarter corner to Section 2 were monumented by County Surveyor personnel from original evidence found in the process of this survey.  
2. To mark the West boundary of Section 2 running North from the Southwest corner to the North one-sixteenth corner and to mark the North boundary of the South-half of the North-half of Section 2. These boundaries were marked with blazed and painted trees and B.C.C. property line tags nailed to the base of trees, on logs and on stumps.  
3. To monument and reference the West one-sixteenth corner on the South boundary and the Southwest one-sixteenth of Section 11.  
4. To mark the South boundary of Section 11 running East from the Southwest corner to the West one-sixteenth corner, then North to the Southwest one-sixteenth corner, then East to the center-South one-sixteenth corner. These boundaries were marked with blazed and painted trees and B.C.C. property line tags nailed to the base of trees, on logs and on stumps.

PROCEDURE: A closed traverse was ran in Section 2 utilizing a one-second theodolite and E.D.M. equipment tying the controlling government corner monuments indicated as found on the annexed map. Found original evidence and County Surveyor re-establishment references verified the position of these monuments. A traverse was also ran Easterly from the North one-sixteenth corner on the West boundary of Section 2 to the North one-sixteenth corner on the East boundary.

From this data, Section 2 was subdivided and corners monumented and referenced on this survey are as follows:

At the North one-sixteenth corner common to Sections 2 and 3 set a 3/4"x24" galvanized iron pipe 21" in the ground with a 2" brass cap marked:

N 1/16  
S 3 | S 2  
RLS 803  
1984

from which:

A 11" Laurel scribed "N 1/16 S 2 BT" on one low blaze bears S 29 3/4° E, 5.2' to the center.

Survey Narrative  
Boise Cascade Corp.  
Page Two

A 12" Laurel scribed "N 1/16 S 3 BT" on one low blaze bears S  $82\frac{3}{4}^{\circ}$  W, 5.1' to the center.

At the center-North one-sixteenth corner set a  $\frac{3}{4}$ "x24" galvanized iron pipe 21" in the ground with a 2" brass cap marked:

RLS 803  
C  
N1/16 | S2  
C

1984

from which:

A 15" cedar scribed "CN 1/16 S 2 BT" on one low blaze bears S  $78\frac{1}{4}^{\circ}$  W, 43.5' to the center.

A 9" cedar scribed "CN 1/16 S 2 BT" on one low blaze bears N  $54\frac{1}{2}^{\circ}$  W, 33.4' to the center.

At the North one-sixteenth corner common to Sections 1 and 2 set a  $\frac{3}{4}$ " x24" galvanized iron pipe 21" in the ground with a 2" brass cap marked:

N 1/16  
S 2 | S1  
RLS 803

1984

from which:

A 13" cedar scribed "N 1/16 S 1 BT" on one low blaze bears S  $76^{\circ}$  E, 26.6' to the center.

A 8" white oak scribed "N 1/16 S 2 BT" on one low blaze bears N  $30\frac{3}{4}^{\circ}$  W, 32.2' to the center.

A one-second theodolite and E.D.M. equipment were also utilized to tie existing controlling monuments as shown on the annexed map in the Southwest quarter of Section 11. The South one-sixteenth corner common to Sections 10 and 11, the center-West and the center-South one-sixteenth corners were set on Filed Survey No. 7365. The Southwest corner and the South quarter corner were monumented from original evidence by County Surveyor personnel.

From this data, the Southwest quarter of Section 11 was subdivided and corners monumented and referenced on this survey are as follows:

At the Southwest one-sixteenth corner to Section 11 set a  $\frac{3}{4}$ "x24" galvanized iron pipe 18" in the ground with a 2" brass cap marked:

RLS 803  
SW1/16 . S11

1984

from which:

A 13" cedar scribed "SW 1/16 S 11 BT" on one low blaze bears S  $61^{\circ}$  E, 7.0' to the center.

A 15" cedar scribed "SW 1/16 S 11 BT" on one low blaze bears S  $32^{\circ}$  W, 26.0' to the center.

Survey Narrative  
Boise Cascade Corp.  
Page Three

At the West one-sixteenth corner common to Sections 11 and 14 set a 3/4"x24" galvanized iron pipe with a 2" brass cap marked:


RLS 803  
S 11  
W1/16 — . —  
S 14

1984

from which:

A 6" cedar scribed "W 1/16 S 11 BT" on one low blaze bears N 74 3/4° W, 29.8' to the center.

A 18" fir scribed "W 1/16 S 14 BT" on one low blaze bears S 19° E, 17.8' to the center.

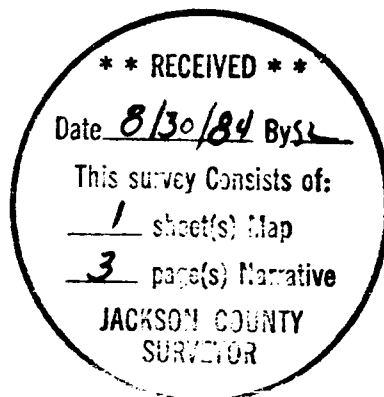

*Gary D. Kaiser*

