

3851

NORPARK

SUBDIVISION

SHERWOOD AVE.

248.42'

48.08'

249.5'

FREMONT STREET

NORMAL AVENUE

INITIAL POINT  
NORPARK SUB'N  
FD. 2" GALV. IRON PIPE

47.0'

N. 89° 55' E (REC. EAST) 283.0'

263.0'

47.0'

PARK STREET

100.0'

V. 570  
P. 449

69.0'

69.0'

100.0'

66-02272

N. 0° 04' W 884.0'

S. 0° 04' E

S.E. CORNER D.L.C. NO. 45


21.0'

N/L SEKIYOU BLVD.

- = FD. 2" GALV. IRON PIPE
- = FD. 1" IRON PIPE
- = SET 5/8" X 30" IRON PIN

SCALE: 1" = 50'

BASIS OF BRGS: NORPARK SUBDIVISION  
IN THE CITY OF ASHLAND, OREGON



REGISTERED  
OREGON  
LAND SURVEYOR

*H. L. Ricks*

JULY 14, 1967  
H. L. RICKS  
813

SURVEY FOR: MR. WILLIAM P. WRIGHT  
SITUATED IN: NE 1/4, NE 1/4, SEC. 15,  
T39S, R1E, W.M., JACKSON COUNTY, OREG.  
BY: H.L. RICKS, L.S., ASHLAND, OREG.  
DATE: OCTOBER 19, 1968

-3851

SURVEY NARRATIVE TO COMPLY WITH ORS 209-250

SURVEY FOR: MR. WILLIAM P. WRIGHT  
595 TAYLOR STREET  
ASHLAND, OREGON

SURVEY LOCATION: NE 1/4 OF THE NE 1/4 OF SECTION 15,  
TOWNSHIP 39 SOUTH, RANGE 1 EAST,  
WILLAMETTE MERIDIAN, JACKSON  
COUNTY, OREGON.



BASIS OF BEARINGS: NORPARK SUBDIVISION, IN THE CITY  
OF ASHLAND, OREGON.

PURPOSE OF SURVEY: TO LOCATE BOUNDARIES OF A PARCEL  
OF LAND.

DATE: OCTOBER 19, 1968.

BY: H. L. RICKS  
80 PINE STREET  
ASHLAND, OREGON.

SURVEY PROCEDURE: USING THE SOUTH BOUNDARY OF NORPARK  
SUBDIVISION (AS RECORDED) FOR CONTROL,  
I WAS ABLE TO LOCATE THE INITIAL POINT  
OF BEGINNING, SAID POINT BEING A 2"  
GALVANIZED IRON PIPE. I THEN LOCATED  
THE SOUTHEAST CORNER OF SAID SUBDIVI-  
SION, A 1" IRON PIPE. USING THESE  
POINTS AS CONTROL AND THE BEARINGS  
AS SHOWN, I THEN TURNED THE CALCULATED  
ANGLES TO SET THE BOUNDARIES AS SHOWN  
ON THIS SURVEY.

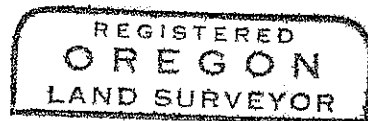

*H. L. Ricks*

