


5390



N 1/2

W 1/4 COR.  
FD. 1 1/2" I. PIPE WITH BRASS CAP  
SET IN 1963 BY B.L.M. & 2 B.T'S.

E 1/4 COR.  
FD. 5/8" DIAM. I. ROD  
SET IN 1971 BY  
E.A. MCGINTY &  
4 B.T'S.

S 89° 51' 54" E

5141.01'

27 26



26 25

SET RED AND WHITE STEEL FENCE POSTS 5 FT  
IN LENGTH AT IRREGULAR INTERVALS ON TRUE  
EAST & WEST CENTERLINE.

S 1/2

NOTE:

BEARINGS ARE REFERRED TO THE TRUE MERIDIAN  
BASED UPON SOLAR OBSERVATIONS.

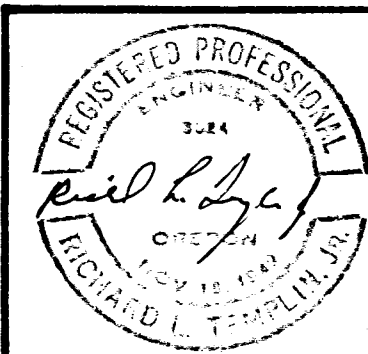

RICHARD L. TEMPLIN  
CONSULTING ENGINEER

**SURVEY OF PORTION OF  
CHENEY FOREST PRODUCTS PROPERTY**


LOCATED IN  
SECTION 26, T. 40 S., R. 1 W., W. M.  
JACKSON COUNTY, OREGON

Surveyed For: Cheney Forest Products, Central Point, Oregon.  
Scale: 1" = 500' October 5, 1973.

5390

RICHARD L. TEMPLIN  
CONSULTING ENGINEER  
715 N.E. SIXTH STREET  
GRANTS PASS, OREGON  
97526

October 5, 1973



SURVEY NARRATIVE

Location: The North  $\frac{1}{2}$  of Section 26, Township 40 South, Range 1 West of the Willamette Meridian, Jackson County, Oregon.

Surveyed for: Cheney Forest Products, Central Point, Oregon.

Purpose: To survey and monument the East-West Centerline of Section 26.

Beginning at the East Quarter Corner of Section 26 which is monumented with a  $\frac{5}{8}$  inch diameter iron rod with a stone along the North side from which:

A Fir snag, 36" in diam. bears N  $47^{\circ}$  E 32.5 ft. dist. face chopped into and scribe visible.

A Fir, dead and down, 40" in diam. bears N  $79^{\circ}$  W 33.0 ft. dist. blaze obliterated.

A Fir 8" in diam. bears N  $19^{\circ}$  W 23.0 ft. dist. scribe visible.

A Fir 12" in diam. bears N  $28^{\circ}$  E 17.5 ft. dist. scribe visible.

I then offset 3.0 feet South and run S  $89^{\circ}46'$  W for 5147.07 feet; thence N  $3^{\circ}43'$  E for 36.21 feet to the West Quarter Corner which is monumented with a  $\frac{1}{2}$  inch diameter iron pipe with brass cap set in 1963 by BLM.

I then computed the true line and run from the West Quarter Corner S  $89^{\circ}51'54"$  E on the true East-West Centerline to the East Quarter Corner.

I then set red and white steel fence posts 5 feet in length at irregular intervals on said true East-West Centerline as per the owners request.

All bearings are referred to the true meridian based upon solar observations.

Survey was executed with a Wild T-16 ED Transit Theodolite, a Buff and Buff one-minute mountain transit, and a 200.00 foot steel chain.

