

1/4 COR.

SURVEY

IN N 1/2 SEC. 15 T. 36 S.,
R. 4 W., W.M., JACKSON CO.,
OREGON

FOR MR. WILLIS STIEHL
FOODLAND FARMS
ROGUE RIVER, OREGON



CN 1/16

4" B. OAK
S24°W 12.0FT
MKD CN 1/16

1320.52

2641.05

1320.52

N00°09'53"E



10" MAD. S75°30'E
12.0FT. MKD CN 1/16

C. 1/4


SCALE: 1" = 400'

NOTE:

- ⊙ = MON. FD.
- ⊙ = 5/8" x 30" I. ROD SET
BASIS OF BEING. PER
RS. NO. 5283



PER E. ZIMMERLUND
CONSULTING ENGINEER
ROGUE RIVER, OREGON
Nov. 1974

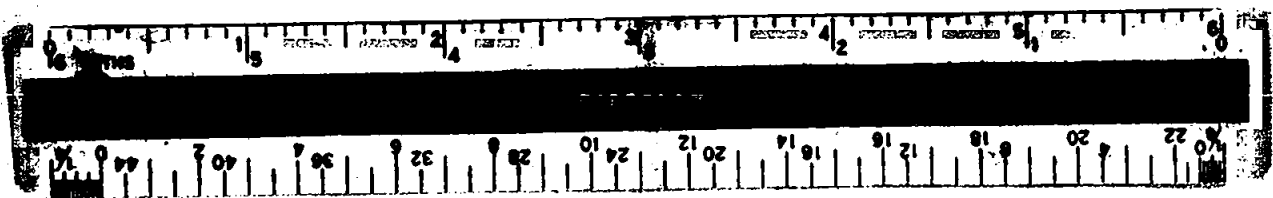

SURVEY NARRATIVE TO COMPLY WITH PARAGRAPH 209.250 O. R. S.

SURVEY FOR: Mr. Willis Stiehl
Foodland Farms
Rogue River, Oregon



LOCATION: North Half of Section 15, Township 36 South, Range 4 West, Willamette Meridian, Jackson County, Oregon.

PURPOSE: To survey and monument the CN 1/16 Corner.

PROCEDURE: Beginning at the N $\frac{1}{2}$ Corner of Section 15, Township 36 South, Range 4 West, Willamette Meridian, Jackson County, Oregon per R.S. No. 5283; thence S 00°09'53" W along the N-S Center Section line of Section 15, 1320.52 feet single proportionate distance to the CN 1/16 Corner, at which point I set a 5/8" x 30" diameter iron rod; thence I continue S 00°09'53" W 1320.52 feet, single proportionate distance to the Center Quarter Corner of said Section 15 per R.S. No. 5283.

All bearings based on N-S Center Section line per R.S. No. 5283.

Survey was executed with a Wild T-16ED Transit Theodolite and 200 foot steel chain.

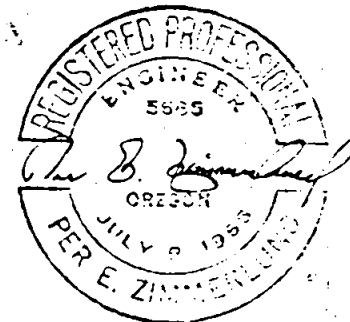

November 1974