


WIT. COR. N89°17'30"W 663.26 WIT. COR.

NORTH 660.00

NORTH 660.00


10 Ac. ±



663.26

N 89° 17' 30" W

663.26



SCALE: 1"=200'





NOTE:
○ - MON PD
● - 5/8" ROD SET
BEARINGS PER
RS NO. 905

SURVEY

IN THE SE 1/4 OF SEC. 26
T34S, R4W, WM, JACKSON CO., ORE.
FOR

H.C. BRADFORD
2441 SYKES CREEK ROAD
ROGUE RIVER, ORE.

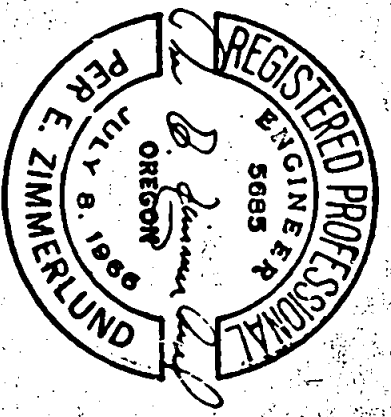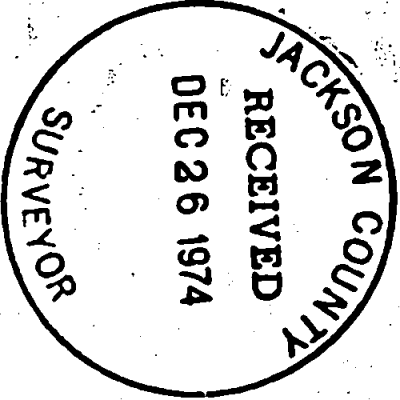

PERE ZIMMERLUND
CONSULTING ENGINEER
ROGUE RIVER, OREGON
W.O. 322 DEC. 24, 1974

SURVEY NARRATIVE TO COMPLY WITH PARAGRAPH 209.250 O. R. S.

SURVEY FOR: H. C. Bradford
2441 Sykes Creek Road
Rogue River, Oregon



LOCATION: In the SE $\frac{1}{4}$ of Section 26, Township 34 South, Range 4 West, Willamette Meridian, Jackson County, Oregon.

PURPOSE: To survey and monument the 10 acres more or less tract as shown on attached plat.

PROCEDURE: Beginning at a 3/4" iron pipe monumenting the E-1/16 Corner between Section 26 and 35 per R.S. No. 905; thence N 89° 17' 30" W along the South line of Section 26, 663.26 feet single proportionate distance at which point I set a 5/8" x 30" diameter iron rod; thence I continue N 89° 17' 30" W 663.26 feet to the $\frac{1}{2}$ Corner common to Sections 26 and 35 monumented with a 1" iron pipe per R.S. No. 905; thence I run North 660.00 feet, at which point I set a 5/8" x 30" diameter iron rod for a witness corner; thence I run S 89° 17' 30" E 663.26 feet, at which point I set a 5/8" x 30" diameter iron rod for a witness corner.

All bearings based on South line of Section 26 per R.S. No. 905.

Survey was executed with a T-16ED Transit Theodolite and a 200.00 foot steel chain.

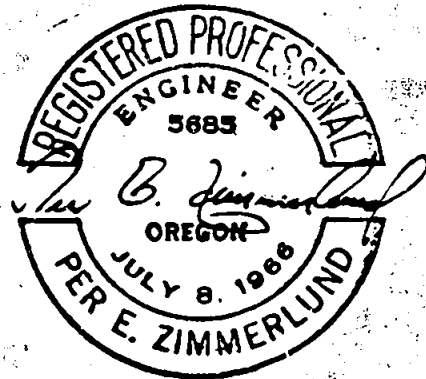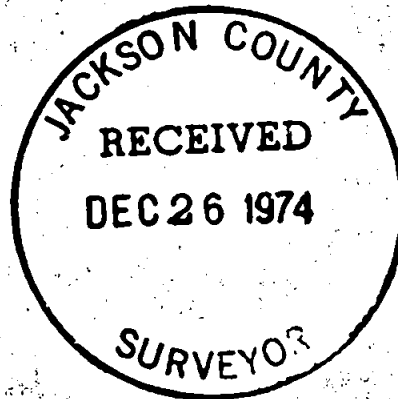

December 24, 1974

34 4W 26