

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250

Survey for: Mr. Ralph Train
945 Fairway Drive
Eugene, Oregon 97404

Location: Located in the southwest quarter of Section 10, Township
34 South, Range 1 West of the Willamette Meridian,
Jackson County, Oregon.

Purpose: To monument the tracts of land shown on the accompanying
map.



Procedure: All of the tracts were created out of the same parent
tract, which has senior rights, and are in conformance
with each other. Utilizing the monuments I recovered on
the east-west centerline, as per Filed Survey No. 9919,
I monumented the tracts shown on the accompanying map
as per deed record.

The found 5/8" iron pins on the easterly Right of Way of
Highway 62 conform with the asbuilt centerline of the
highway. I held these monuments to be the Right of Way
line despite the fact they are not of record.

Basis of Bearing is the east-west centerline as per
Filed Survey No. 9919.

Surveyed by: Herbert A. Farber
616 China Gulch Road
Jacksonville, Oregon 97530

Date: September 18, 1986

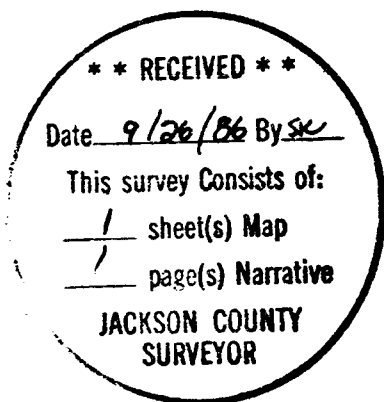

T.L. 200,202,1601,1613,1614,1617,1618