

2732

CORNER RECORD


10875

SH. 1 OF 1

T. 48 N, R. 6W, MD MERIDIAN

SISKIYOU COUNTY, CALIFORNIA

CORNER LOCATION



1. CORNER IDENTIFICATION / HISTORY / REMARKS

California - Oregon State Line Mile Post 129

CB 18 PG 14

2. DESCRIBE CORNER EVIDENCE FOUND

DATE OF VISIT 5 - 6, 19 82

Found brass cap set in 1916.


3. DESCRIBE BEARING TREES OR OTHER ACCESSORIES FOUND

Found pine stump, scribed (1916), N57°W, 41 lks.

Found pine stump, scribed (1916), N19°E, 72 lks.

4. DESCRIBE NEW MONUMENT SET & METHOD EMPLOYED OR WORK DONE TO PRESERVE EXISTING MONUMENT


None.

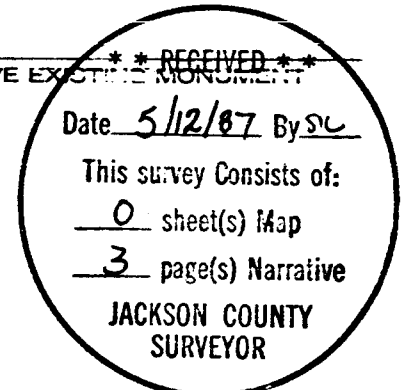

5. DESCRIBE NEW ACCESSORIES, NEW BEARING TREES & HOW THEY ARE MARKED

Scribed 12" Cedar, N43°E, 22.5'.

Scribed 4" Yellow Pine, S24°E, 2.6'.

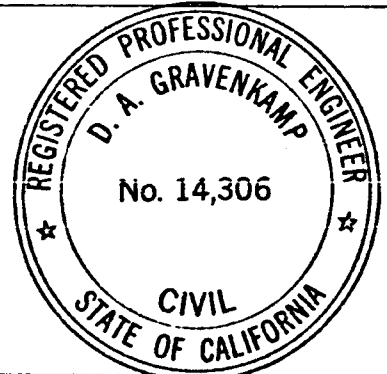

SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON July 1 1982

SIGNED

J.S. or R.C.E. No. 14,306

SEAL

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED 7-9 19 82 AND EXAMINED AND FILED 7-9 19 82

BY Roger L Blake

TITLE

2734

CORNER RECORD


10875

SH. 1 OF 1

T. 48 N, R. 6W, MD MERIDIAN

SISKIYOU COUNTY, CALIFORNIA

CORNER LOCATION



1. CORNER IDENTIFICATION / HISTORY / REMARKS

Mile post 127 miles 37 chains on the California-Oregon border.

CB 18 PG 15

2. DESCRIBE CORNER EVIDENCE FOUND

DATE OF VISIT 5 - 26, 19 82

Found 3" brass cap in rock mound set in 1916.

3. DESCRIBE BEARING TREES OR OTHER ACCESSORIES FOUND

Fd. 18" juniper, scribed, S27°30'W, 263 lks.

Fd. pine, down and scribed, S6°30'W, 215 lks.

Fd. 36" pine, scribed, N6°15'E, 215 lks.

Fd. 38" pine, scribed, N13°15'W, 275 lks.


4. DESCRIBE NEW MONUMENT SET & METHOD EMPLOYED OR WORK DONE TO PRESERVE EXISTING MONUMENT

None.

5. DESCRIBE NEW ACCESSORIES, NEW BEARING TREES & HOW THEY ARE MARKED

Scribed 6" juniper, S25°E, 61.4'.

Scribed 4" White Oak, N26°W, 32.0'.

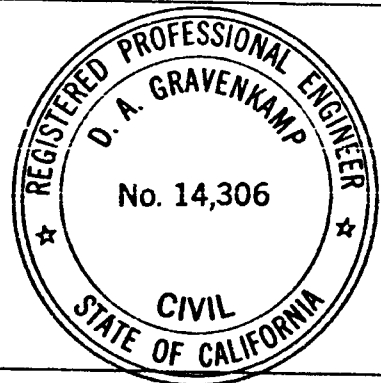

SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON July 6, 19 82

SIGNED

L.S. or R.C.E. No. 14,306

SEAL

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED 7-9 19 82 AND EXAMINED AND FILED 7-9 19 82

BY

TITLE

Roger L. Blake

2733

CORNER RECORD


10875

SH. 1 OF 1

T. 48 N, R. 6W, MD MERIDIAN

SISKIYOU COUNTY, CALIFORNIA

CORNER LOCATION



1. CORNER IDENTIFICATION / HISTORY / REMARKS

Mile post 126 miles 6 chains on the California-Oregon border.

In 1868, a 2 ft. diameter pine tree was established as the corner. In 1916, F.W. Rodolf recovered the corner as being a 30" diameter yellow pine tree and at a point 5 links west of the corner tree, he set an iron post with a brass cap.

CR 18 PG 14

2. DESCRIBE CORNER EVIDENCE FOUND

DATE OF VISIT 5 - 11, 19 82

Found the 1868 corner tree, dead and down, lying out of position in the creek.

1916 brass cap not found, apparently washed out.

3. DESCRIBE BEARING TREES OR OTHER ACCESSORIES FOUND


Found the following 1916 bearing trees; all bearings and distances are from the 1916 brass cap:

- 17" Juniper, N45°30'E, 42 lks.
- 24" Pine, S28°45"E, 82 lks.
- Pine stump, S22°30"W, 118 lks.

4. DESCRIBE NEW MONUMENT SET & METHOD EMPLOYED OR WORK DONE TO PRESERVE EXISTING MONUMENT

As determined from the 1916 bearing trees, the corner falls in the creek.

Nothing was set at corner position.

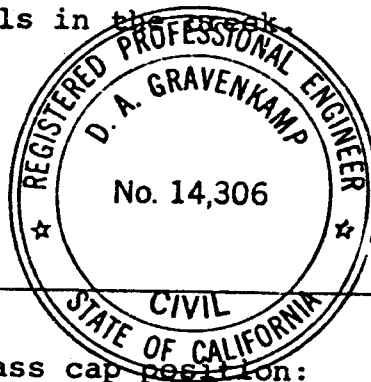

5. DESCRIBE NEW ACCESSORIES, NEW BEARING TREES & HOW THEY ARE MARKED

The following bearings and distances are from the 1916 brass cap position:

- 6" White oak, N58°W, 14.3'.

At N37°W, 8.0 ft., at the south end of a 10'x5'x6' boulder, I bury a red-brown wine bottle and a 2" diameter brass buckle, 1.5 ft. deep and build a rock mound on the surface.

SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON July 6, 1982

SIGNED

LS or R.C.E. No.

14,306

SEAL

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED 7-9 1982 AND EXAMINED AND FILED 7-9 1982

BY

TITLE

Roger L. Blake