



MARK E. BOYDEN
R.P.L.S. ORE 281

108 MISTLETOE ST., MEDFORD, OREGON 97501
PHONE (503) 773-6000

GARY D. KAISER
R.P.L.S. ORE 903

SURVEY NO 10390

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250

SURVEY FOR: MICHAEL G. HAYS
2192 Kings Highway
Medford, Oregon, 97501

SURVEY BY: BOYDEN SURVEYORS
108 Mistletoe Street
Medford, Oregon, 97501

LOCATION: Section 1 and D.L.C. No. 38, T.38S., R.2W.,
W.M., Medford, Jackson County, Oregon.

BASIS OF BEARINGS: Filed Survey No. 481 (center line of
Kings Highway).

DATE: June 2, 1987


PURPOSE: To monument that tract described in Inst.
No. 83-19174 O.R.

PROCEDURE:

Utilizing E.D.M. equipment, tied the controlling monuments
and traversed around the subject tract.

The Northeast corner of the subject tract was located Deed
Record Distance Northerly along the East boundary of D.L.C. No.
38 from the Southeast corner of said claim. The tract boundaries
were then located Deed Record Distance and angle therefrom. This
agrees with the procedure used on Filed Survey No.s 1397 & 2496
and also agrees with the Westerly improvement line. This proce-
dure leaves a record gap of 0.75' to 1.64' on the North boundary.
The clients temporary needs were satisfied with corners located
by his Deed and was not interested in pursuing the gap
problem at this time.

The subject tract corners were monumented as shown on the
annexed map with a witness corner set for the
Northwest corner as the record corner falls
on the fence corner.

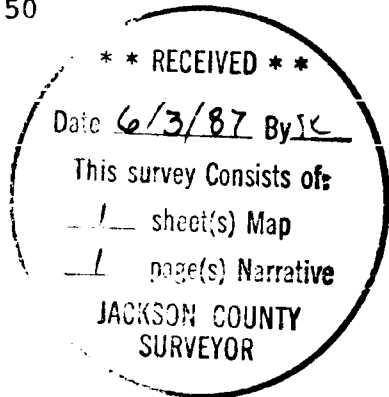

Gary D. Kaiser

