

Paul Rynning  
 County Surveyor  
 Medford, Oregon

SUBJECT: Re-establishment of obliterated corners.

Corner of Sec. 31 and 32, Township 37 South, Range 2 West, W.M.  
 Corner of Sec. 5 and 6, Township 38 South, Range 2 West, W.M.



Found remains of rotten stake approx. 2 feet deep, set a 3/4 inch pipe  
 24 inches below surface.

Found evidence of pine South 25° West, 80 lks.

Found sprouts of black oak, being near original black oak B T., S.61°E.

Found laurel sprouts from probable original B T., N.57°W., 71 lks.

A laurel 10 ins. diam., bears N.26°W., 40.4 feet, scribed 301 BT  
 A black oak, 12 ins. diam., bears S.4°W., 35.7 ft. scribed 301 BT  
 A Y pine, 15 ins. diam., bears S.53°E., 14.7 feet, scribed 301 BT

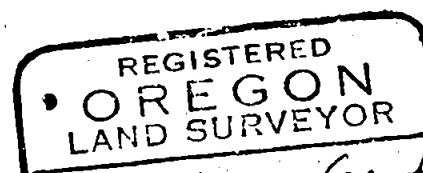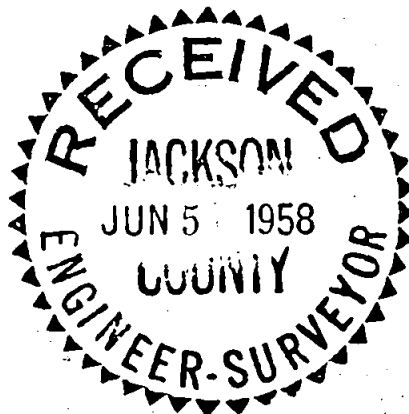

*Edward A. McGinny*  
 JULY 10, 1958  
 EDWARD A. MCGINNY  
 301