

11363

SURVEY NARRATIVE TO COMPLY WITH  
PARAGRAPH 209.250 OREGON REVISED STATUTES

SURVEY FOR: Rogue River National Forest  
P. O. Box 520  
Medford, OR 97501

LOCATION: Section 5, Township 36 South, Range 4 East,  
Willamette Meridian, Jackson County, Oregon.

PURPOSE: To preserve and protect deteriorating corner  
evidence.

PROCEDURE: Utilizing existing corner evidence recovered at  
the corner point, I verified the corner point from  
recovered accessories, stabilized the monument as  
needed and marked additional accessories as  
required to perpetuate the corner point.

BASIS OF BEARING: G.L.O. record - 1925.

DATE: September 26, 1988

HAROLD L. CENTER  
Registered Professional Land Surveyor  
Oregon Certificate No. 1071

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR


*Harold L. Center*  
OREGON  
HAROLD L. CENTER  
JAN 28 1976  
No. 1071

\*\* RECEIVED \*\*  
Date 10/27/88 By SK  
This survey Consists of:  
1 sheet(s) Map  
2 page(s) Narrative  
JACKSON COUNTY  
SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The 8th Standard Parallel South, Township 35 South, Range 4 East, Willamette Meridian, Jackson County, Oregon, was surveyed by Rufus Moore under Contract No. 504, dated May 27, 1884. Surveyor Moore established the one-quarter corner for Section 5, Township 36 South, Range 4 East, and Section 32, Township 35 South, Range 4 East, during this survey.

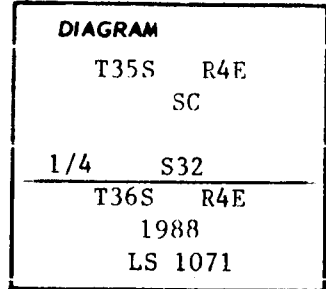

Lincoln Wilkes recovered this standard corner monument and changed it to one of minimum control for Section 32 only under Special Instructions for Group No. 86, dated July 11, 1922.

Description of corner evidence found:

At the corner point, I found a 9"x6"x5" stone, marked SC1/4 on north side, and the following accessories:  
A 39-inch diameter pine bears N.04°01'W., 98.15 feet distance, with a healed blaze.  
A 13-inch diameter pine bears N.06°06'E., 21.15 feet distance, with scribing SC1/4 visible in an opened blaze.


Description of monument and accessories I established to perpetuate the original location of this corner

At the corner point, I set a 2 1/2-inch diameter iron post 31 inches in the ground with a 2 1/2-inch diameter brass cap monument, marked as shown in the diagram, and mark the following accessory:

A 13-inch diameter pine bears N.64°19'E., 35.30 feet distance, scribed 1/4 S32 LS1071 BT.

September 26, 1988

HAROLD L. CENTER  
Registered Professional Land Surveyor  
Oregon Certificate No. 1971

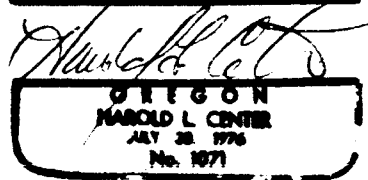

Office of ..... County of .....  
State of ..... , I hereby certify that the within instrument was filed in this office  
for record on the ..... day of .....; 19....., at ..... o'clock .....m., (signed)  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)