

leo kanglois, Property

Sec. 32, T39S, R2E. W.M.

Jackson County

Oregon

Scale 1" = 50ft.

Feb. 1959

| | |
|-----------|----|
| T39S, R2E | |
| 31 | 32 |
| 6 | 5 |
| T40S, R2E | |

1/2" pipe
S63°30'W

346.79'
S37°42'15"E

1/2" pipe

N53°30'15"E
138.35'

75' R/W

740.91'
S63°30'W

3.67 Acres ±

N46°19'45"E
155.35'

RIGHT

N32°46'00"E
127.32'

STATE

Way

N25°06'30"E
130.99'

Highway



N18°56'45"E
110.20'

66

Steel Post
402.79'
S63°30'W

N.E. Cor., 1/8 rod
Gov't Lot 4, Sec. 32

North

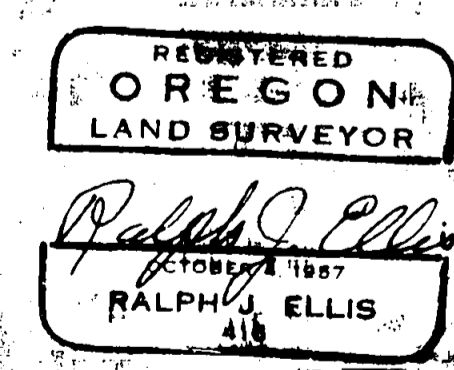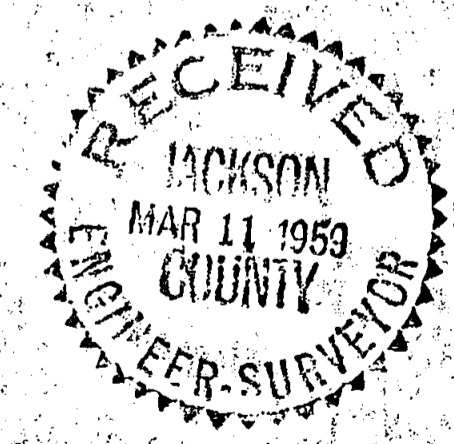

SURVEY NARRATIVE TO COMPLY WITH PARAGRAPH 209.250
OREGON REVISED STATUTES

FOR: Mr. Leo Langlois

PURPOSE: To locate the boundaries of an area, bound on the east by the Right of Way fence of State Highway 66. Bound on the West by a straight line from the N.E. corner of Government lot 4 section 32 to the Section Corner $\frac{31|32}{61|5}$ T39S and T40S, R2E. Bound on the South by a line designated by Mr. Langlois.

PROCEDURE: Mr. Langlois had a map prepared by the Bureau of Reclamation, showing the corners involved with a bearing of the straight line between the N.E. Corner of Government Lot 4 and the section corner $\frac{31|32}{61|5}$. I found the NE Corner of Government lot 4 and determined a straight line between the corner mentioned and a steel pin at the base of a steel post set in concrete marking the SW corner of the total area owned by Mr. Langlois which according to the map lies on the straight line mentioned above. Another steel pin at the base of a steel post set in concrete on the Right of way of Highway 66 was found. This pin was on the line mentioned above and a chainage check from the NE Corner of Government lot 4 showed it would mark the NE corner of the area to be described. From this corner I made the necessary measurements to close the area. On the East side I was bound by the Right of way fence, which is a new fence, evidently surveyed by the State Highway department. This portion of the fence lies on a large curve--I did not try to locate the Right of way curve but followed the fence as close as possible using short chords. I used 1/2 " pipe to mark the SW and SE corners, there only being three corners to the property.

REGISTERED
OREGON
LAND SURVEYOR
Ralph J. Ellis
OCTOBER 4, 1957
RALPH J. ELLIS
416

RECEIVED
JACKSON
MAR 11 1959
COUNTY
ENGINEER-SURVEYOR