

Edwards Surveying & Land Planning Inc.

816 West 8th Street
Medford, OR 97501
Tel.: (503) 776-2313
FAX: (503) 776-9978



598 NE "E" Street, Suite B
Grants Pass, OR 97526
Tel.: (503) 471-7059
FAX: (503) 471-7809

SURVEYING • ENGINEERING • PLANNING

SURVEY NUMBER 14817

SURVEY NARRATIVE TO COMPLY WITH CHAPTER 209, PARAGRAPH 250,
OREGON REVISED STATUTES

At 'F' set a Witness Monument on the high bank:
A 5" diam. Cedar brs. N. 32° W., 49.4 feet.
A 29" diam. Fir brs. S. 3° W., 48.8 feet.

At WE 1/64 Section 27 and Section 34:
A 21" diam. Maple brs. N. 59° W., 21.8 feet.
A 12" diam. Maple brs. N. 22° E., 23.8 feet.

At 'G':
A 4" diam. tree (believed to be a Hawthorne)
brs. S. 81° E., 10.2 feet.
A 12" diam. Maple brs. S. 1° W., 53.0 feet.

At 'H':
A 6" diam. Fir brs. N. 33° W., 7.4 feet.
A 6" diam. Fir brs. S. 23° W., 8.6 feet.

At 'I':
A 5" diam. Fir brs. N. 37° E., 2.8 feet.
A 7" diam. Fir brs. S. 10° E., 6.0 feet.


At 'J':
A 17" diam. Fir brs. N. 54° E., 8.1 feet.
A 16" diam. tree (believed to be a Hawthorne)
brs. S. 12° W., 7.0 feet.

At NWSE 1/64 Section 27:
A 15" diam. Fir brs. S. 77° E., 56.2 feet.
No other suitable trees available.


BASIS OF BEARINGS: Existing control per Survey Number 12624 filed by this office.

EQUIPMENT: Nikon DTM-A5 Electronic Total Station.

DATE COMPLETED: January 12, 1996

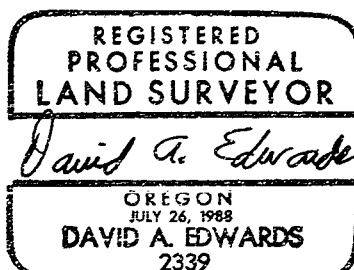

Expires 12/31/97

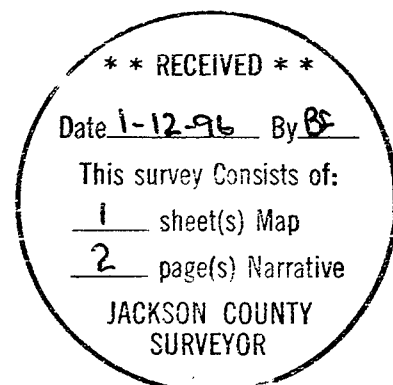

Edwards Surveying & Land Planning Inc.

816 West 8th Street
Medford, OR 97501
Tel.: (503) 776-2313
FAX: (503) 776-9978



598 NE "E" Street, Suite B
Grants Pass, OR 97526
Tel.: (503) 471-7059
FAX: (503) 471-7809

SURVEYING • ENGINEERING • PLANNING

SURVEY NUMBER 14817

SURVEY NARRATIVE TO COMPLY WITH CHAPTER 209, PARAGRAPH 250,
OREGON REVISED STATUTES

SURVEY FOR: Boise Cascade Timber and Wood Products Group
P.O. Box 100
Medford, Oregon 97501

LOCATION: In the Southeast 1/4 of Section 27 and North 1/2 of
Section 34, T. 38 S., R. 4 E., W.M.,
Jackson County, Oregon.

PURPOSE: To locate and monument the corners of Boise
Cascade lands in Section 27 and 34, and to blaze
trees marking the boundaries of said lands as shown
on the accompanying map.

PROCEDURE: Utilizing existing control points and data
established by this office during the execution of
Survey Number 12624, as well as additional ties
shown on the accompanying map, computed the
position of the desired boundaries, making use of
Volume 531, Page 208, Deed Records for above said
County and State. The true lines were then marked
and trees were blazed if they were within 3 feet of
the line. Bearing trees were marked according to
the 1973 B.L.M. Manual and were measured to the
center of the tree at the root crown. Monuments
set on this survey consist of 5/8" x 30" steel pins
with red plastic caps mkd. "D.A. EDWARDS-LS 2339".
The bearing trees are situated as follows:

At 'A' set a Witness Monument on the high bank:
A 10" diam. tree (believed to be a Hawthorne)
brs. N. 81° W., 31.2 feet.
No other suitable trees available.

At 'B' set a Witness Monument on the high bank:
A 4" diam. D. Fir brs. S. 68° E., 5.7 feet.
No other suitable trees available.

At 'C' set a Witness Monument on the high bank:
A 6" diam. Twin Oak brs. S. 36° W., 53.9 feet.
A 12" diam. Oak brs. S. 52° E., 12.7 feet.

At 'D' set a Witness Monument on the high bank:
A 12" diam. Oak brs. N. 81° W., 26.5 feet.
A 19" diam. Oak brs. N. 36° E., 71.0 feet.

At the CNN 1/64 corner of Section 34:
A 38" diam. Fir brs. N. 38° W., 10.7 feet.
A 13" diam. Maple brs. N. 18° E., 22.2 feet.

At 'E' set a Witness Monument on the high bank:
A 4" diam. tree (believed to be a Hawthorne)
brs. S. 74° W., 33.0 feet.
A 29" diam. Maple brs. N. 15° E., 45.4 feet.