

SURVEY NO. **15633**

**Certified Record of Land Corner Monumentation  
to Comply With Paragraph 209.130, O.R.S.**

**History of Original Establishment:**

The original one-quarter corner for Sections 26 and 35, Township 40 South, Range 1 West, Willamette Meridian, Jackson County, Oregon, was established by **Rufus S. Moore** under Contract No. 475 dated July 3, 1883.

At the corner point, Moore set a granite stone, 16 X 12 X 10, firmly in the ground, with 1/4 marked on the north face. Moore marked the following accessories:

A fir, 8 ins. diameter, bears N.30°E., 27 lks. distance, marked 1/4 SBT.

A fir, 11 ins. diameter, bears S.6°W., 5 lks. Distance, marked 1/4 SBT.

**Description of Corner Evidence Found:**

Near the corner point, I found a granite stone, 12 X 12 X 7, marked "1/4," lying on top of the ground .

A 22-ins. diameter white fir (original NE bearing tree) with scribing visible in the blaze I opened.

No evidence of the original SW bearing tree could be found. The area has been partially disturbed by logging.

**Description of Accessories Established to Perpetuate the Original Corner Position:**

I determine the correct position of the corner point from the recorded bearing and distance from the only remaining accessory.

At the corner point, I set a 2 1/2-ins. diameter (28-ins. long) iron post 23 ins. in the ground, with brass cap marked:

T 40 S R 1 W  
S 26  
1/4 \_\_\_\_\_  
S 35  
1996  
LS 2332

From which;

A 22-ins. diameter white fir, bears N.30°E., 17.82 feet (27 lks.) distance.


And mark the following new accessories:

A 9-ins. diameter Douglas-fir, bears S.55°52'W., 28.93 feet distance, scribed 1/4S35BT, with brass washer stamped LS2332 attached.


A 12-ins. diameter Douglas-fir, bears N.69°35'W., 49.07 feet distance, scribed 1/4S26BT, with brass washer stamped LS2332 attached.

**Basis of Bearing: Solar Observation**


**Stephan L. Barott**  
Registered Professional Land Surveyor  
Oregon Certificate No. 2332

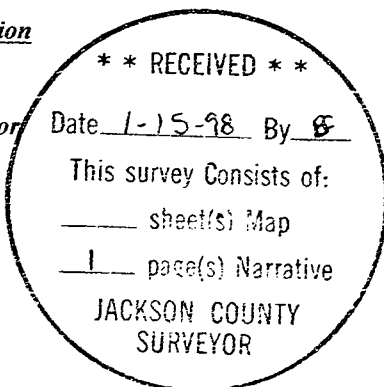

**Date: January 15, 1998**



*Stephan L. Barott*



**Certificate Expires 12/31/1999**