

Survey No. 15658

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250

Survey for: Joe Vaninetti
10117 Ramsey Road
Gold Hill, Oregon 97525

Location: Located in all quarters of Section 13,
Township 35 South, Range 3 West of the
Willamette Meridian, Jackson County, Oregon.

Purpose: To monument the center quarter of Section 13
per clients request.

Procedure: Utilizing control established in the
performance of filled survey number 14275 at
the Jackson County Surveyor's Office, Oregon.
I set the center quarter of Section 13.

The monument is a 5/8 by 30 inch iron pin
with a yellow plastic cap marked "FARBER PLS
2189".

The following bearing trees were blazed and
scribed "C 1/4 S13 BT" and painted red. A
bearing tree location tag was placed above the
blaze at chest height and a brass washer
stamped "PLS 2189" was nailed at the base of
the blaze.



A 24 inch oak bears:	North 84°47'15" East	16.89 feet
A 5 inch fir bears:	South 50°47'11" East	7.60 feet
A 84 inch double trunk maple bears:	South 43°35'57" West	31.84 feet
A 8 inch maple bears:	North 10°04'57" West	87.69 feet

The corner falls in an area burnt by forest
fire. All surrounding trees are burnt and
dead, including the bearing trees marked
above.

Surveyed by: Farber & Sons, Inc.
Farber Surveying
908 East Jackson Street
Medford, Oregon 97504

Date: February 12, 1998

faf\hull1989\narcl-4.doc

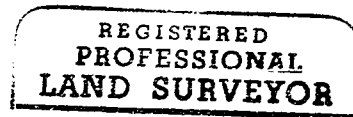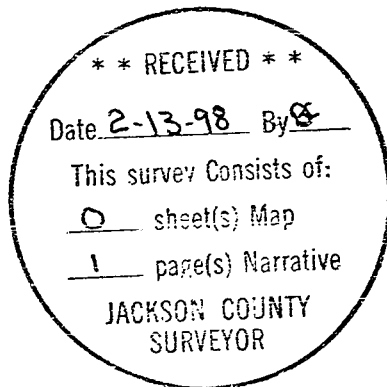

Herbert A. Farber



RENEWAL DATE 12-31-99