

SURVEY NARRATIVE TO COMPLY WITH PARAGRAPH 209.250 OREGON REVISED STATUTES

FOR: ELK LUMBER COMPANY

PURPOSE: To rehabilitate and perpetuate the 1/4 Section corner common to Sections 26 and 25, Township 32 South, Range 1 East, W.M.

PROCEDURE:

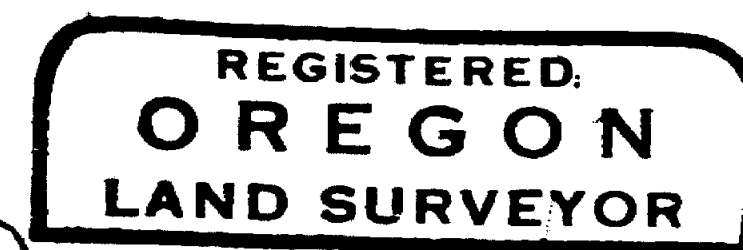
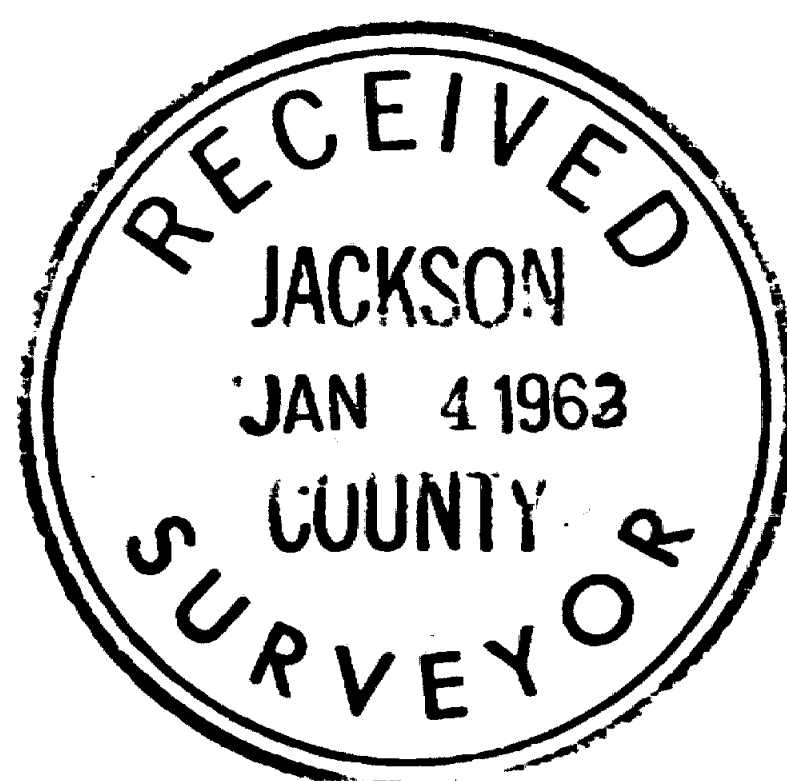
Found the original stone in place and remains of both original B.T.'s. At this time no scribing is visible on either tree, but on August 16, 1949 I found legible scribing in the Southwest B.T. and at that time verified the position of the corner stone and the location of the Northeast B.T.

At a point 0.7 feet due West of the center of the original corner stone I set a 1 inch by 36" galvanized steel pipe driven 30 inches in the ground and topped with a 1½ inch to 1" galvanized bell reducer filled with pot metal and stamped "T 32S R 1E 1/4 Cor. 26/25 RS 583 1962", all in 1/8 inch letters and numerals.

From the center of the original stone a double blazed 28.8 inch Douglas Fir scribed "RS 583" in the upper blaze and "B.T." in the lower blaze bears S 100°E a distance of 7.8 feet. Also from the center of the original stone, a double blazed 6 inch Douglas Fir scribed "RS 583" in the upper blaze and "B.T." in the lower blaze bears N 75°W a distance of 17.9 feet. Compass variation was set at 20°00' East. Distances were taken to face of blaze.

Present were Brice Brandt, Kermit Neville, Edward Paxton and Dean Pruitt.

December 1962

*Robert M. Vincent*