


Deposition taken on the 14th day of November 1962 at the County Court House in Jackson County, Missouri, before me, the undersigned, a Notary Public in and for said County and State, personally appeared Earl E. Remsen, known to me to be the owner of the above described land, and he acknowledged to me that he executed the foregoing plat of land for the purposes and consideration therein expressed, and that the contents of the same are true and correct. My commission expires on the 14th day of November 1963.

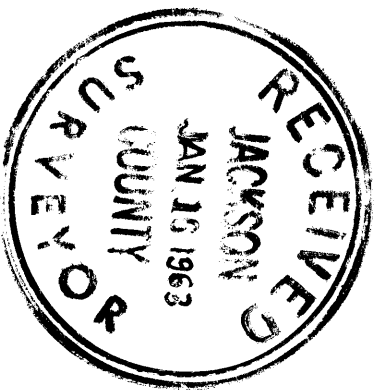

Ernest A. Lindberg

Survey No. 2070

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250

For: Earl E. Remsen
Butte Falls, Oregon


Location: $S\frac{1}{2}SW\frac{1}{4}$ Section 12, & $N\frac{1}{2}NW\frac{1}{4}$ Section 13, T35S, R2E, W.M.

Purpose: To monument and describe a portion of land belonging to the above party.

Procedure: Found $\frac{1}{4}$ corner monument common to Sec. 12 and 13, and monument common to Sec, 11,12,13, and 14. Ran random line between above corners, computed bearing between corners by sun shot and set $\frac{1}{2}$ "x3' pipe for 1/16 corner midway between corners on line.

Found old corner monuments around C. E. Wilhite property. Began at 1/16 corner, ran Northerly to old Wilhite property corner bolt, then along Wilhite property boundary to County Road, along County Road, around parcel and back to the point of beginning, tying to old monuments and setting pipes for all new corners.

November, 1962

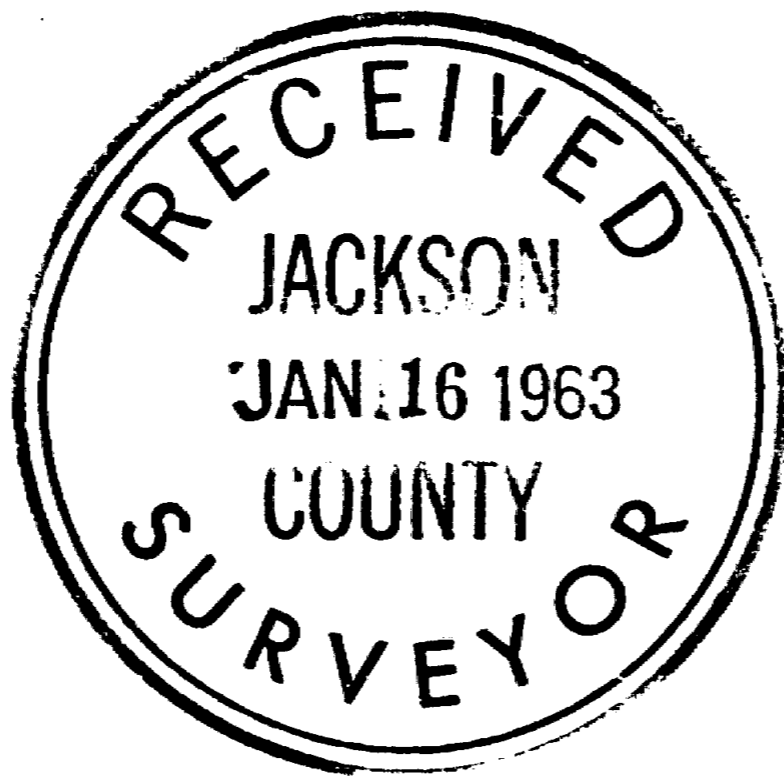

Duane A. Smeltzer

