

MONUMENT REPLACEMENT SURVEY NARRATIVE


REPLACEMENT OF DESTROYED SURVEY MONUMENTS, PER MAP OF SURVEY FILED SURVEY NUMBER 21201 IN JACKSON COUNTY SURVEYORS OFFICE, BY THIS OFFICE ALONG SPRINGBROOK ROAD AND DELTA WATERS ROAD, JACKSON COUNTY, OREGON

SOUTHWEST 1/4 SECTION 08, TOWNSHIP 37 SOUTH, RANGE 1 WEST, WILLAMETTE MERIDIAN
NORTHWEST 1/4 SECTION 17, TOWNSHIP 37 SOUTH, RANGE 1 WEST, WILLAMETTE MERIDIAN

SURVEY FOR: CITY OF MEDFORD
411 WEST 8TH STREET
MEDFORD, OR 97501

SURVEY BY: CITY OF MEDFORD
411 WEST 8TH STREET
MEDFORD, OR 97501

DATE OF SURVEY: MAY, 2014

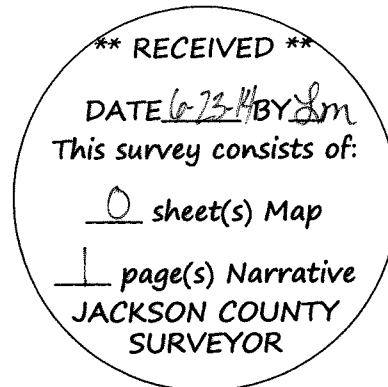

PURPOSE: TO RE-ESTABLISH THE LOCATION OF 4 OF THE FOUND MONUMENTS DESTROYED BY ROAD CONSTRUCTION. UTILIZING THE CONTROL AND RECOVERED MONUMENT POSITIONS PER SURVEY NUMBER 21201, THE DESTROYED MONUMENTS OUTSIDE EXISTING RIGHT OF WAY WERE RESET AS DESCRIBED BELOW.


EQUIPMENT: ONE TRIMBLE S6 ROBOTIC TOTAL STATION, AND ONE TRIMBLE TSC2 DATA COLLECTOR

PROCEDURE: POINT NUMBERS 302M, 375M, 376M, 377M, 385M, AND 412M ARE WITHIN EXISTING RIGHT OF WAY AND NOT RESET.

POINT NUMBERS 307M, 311M, 330M1, AND 345M WERE RESET WITH A 5/8"x30" REBAR WITH A 1-1/2" ALUMINUM CAP MARKED CITY OF MEDFORD, AS SEEN IN DETAIL BELOW. CAP IS SET FLUSH WITH GROUND.

ALL OTHER FOUND MONUMENTS SHOWN ON SAID SURVEY NUMBER 21201 WITHIN THE LIMITS OF THE CONSTRUCTION, WERE FOUND TO BE IN PLACE AND UNDISTURBED AT THE TIME OF THIS POST CONSTRUCTION MONUMENT REPLACEMENT SURVEY.

SET MONUMENT DETAIL 5/8" x 30" REBAR WITH A 1-1/2" ALUMINUM CAP MARKED:



371W08C AND 371W17B

CITY OF MEDFORD - SURVEYING DEPARTMENT

PROJECT NUMBER: P-1791

SHEET 1 OF 1