22988

RECORD OF MONUMENT PRESERVATION

LOCATED IN THE NORTHEAST 1/4 OF SECTION 3

TOWNSHIP 37 SOUTH, RANGE 2 WEST,

WILLAMETTE MERIDIAN, JACKSON COUNTY, OREGON

** RECEIVED **
DATE 1/6/2020 BY PB
This survey consists of:
1 sheet(s) Map
0 page(s) Narrative
JACKSON COUNTY SURVEYOR

SURVEY NARRATIVE TO COMPLY WITH O.R.S 209.150

DATE OF FIELD SURVEY: OCTOBER 24, 2019

BASIS OF BEARING: NONE

PURPOSE: TO PERPETUATE EXISTING CENTERLINE MONUMENTATION ON CREST DRIVE IN CENTRAL POINT AS SHOWN ON FILED SURVEY NUMBER 4830, PRIOR TO SEWER LATERAL CONSTRUCTION.

PROCEDURE:
FOUND EXISTING METAL DISK IN MONUMENT CASE WITH PUNCH MARK. SET 4 ACCESSORIES AS SHOWN AND DESCRIBED HEREON, PRIOR TO REPLACEMENT OF AN EXISTING SEWER LATERAL BEGINNING OCTOBER, 2019. MEASUREMENTS WERE MADE AS SHOWN AND WILL BE USED TO RE-SET THE MONUMENT AFTER CONSTRUCTION IS COMPLETE OR NO LATER THAN DECEMBER 20, 2019.

LEGEND

● SET MAG NAIL WITH 1-1/2" STEEL WASHER MARKED "MLS 82769"

▲ FOUND METAL DISK IN MONUMENT CASE WITH PUNCH MARK PER FILED SURVEY NUMBER 4830

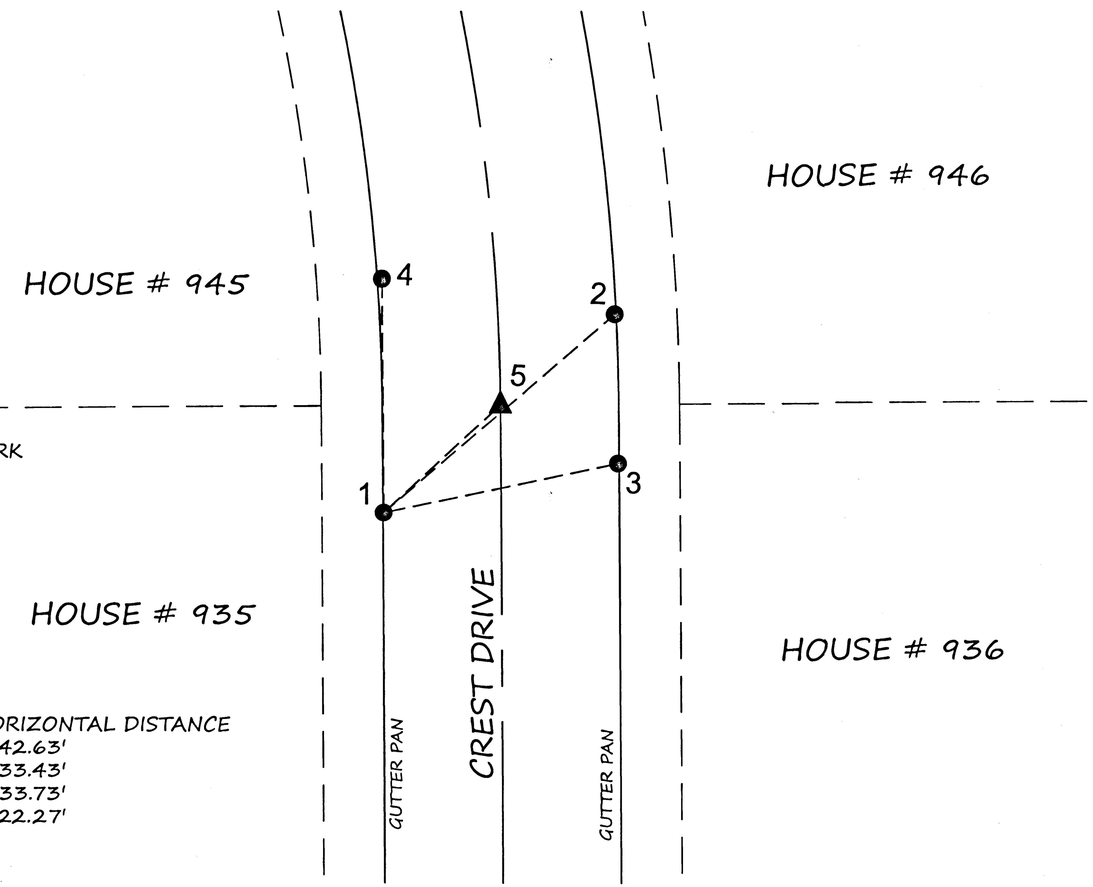

INSTRUMENT @ POINT 1
BACKSIGHT @ POINT 2

FORESIGHT POINT	ANGLE RIGHT	HORIZONTAL DISTANCE
2	00-00-00	42.63'
3	28-48-42	33.43'
4	310-26-24	33.73'
5	357-51-49	22.27'

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Sean P. Metzger
OREGON
JUNE 8, 2009
SEAN P. METZGER
No. 82769
RENEWS: 12/31/2020

PREPARED BY:
METZGER LAND SURVEYING, LLC
P.O. BOX 3521
CENTRAL POINT, OR 97502
PHONE: 541-727-2749

SURVEY FOR:
ROGUE VALLEY SEWER
138 WEST VILAS ROAD,
CENTRAL POINT, OREGON

0' 20'
SCALE: 1"=20'

DRAWN BY: SPM
DATE: 11/14/2019

SHEET 1 OF 1

T37SR2W03A

22988