

# OREGON CORNER RESTORATION FORM

23040

SECTION 2

TOWNSHIP 35 S.

RANGE 3 W.

COUNTY JACKSON


DATE 2/24/2020

TRACT SARDINE CREEK

POINT IDENTIFIER 600700

### CORNER DESIGNATION:

T34S R3W



T35S R3W

- CONDITION REPORT ONLY
- NOT FOUND
- RENEWED
- UNRECORDED
- SURVEYED IN
- REFERENCED OUT

### PREVIOUS RENEWALS/SURVEYS, ETC.:



PERPETUATED AND RECORDED BY HURST IN 1976, BLM FIELD NOTES PAGES 395 AND 396 ON BLM CADASTRAL WEBSITE

### ACCESSORIES FOUND: (CONDITION AND SOURCE)

- 12" WHITE FIR LOW STUMP WITH PARTIAL ROTTEN FACE BEARS S35 1/2°W 33.0 FT. AS PER BLM RECORD
- 15" FIR AT BLM RECORD OF S0 1/4°E 17.16 FT. TO ROOT HOLE, TREE IS DOWN AND UPROOTED
- 24" FIR BEARS N64 1/2°E 52.8 FT. AS PER BLM RECORD HEALED FACE AND BT TAG

### MONUMENT DETAIL:

**SKETCH:**  
(NOT TO SCALE)

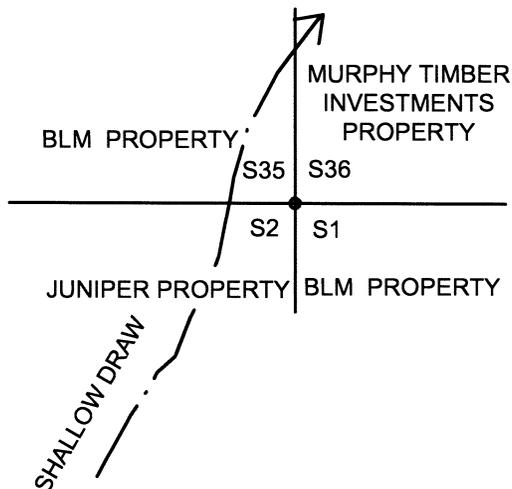

### MONUMENT:

FOUND 1976 HURST BCIP

### NEW ACCESSORIES:

- 9" PINE BEARS S60°E 16.5 FT. WE SCRIBE S1 BT AND TAG TREE
- 6" DOUG FIR BEARS S76°W 40.65 FT. WE SCRIBE S1 BT AND TAG TREE

### LOCATION & COMMENTS:

CORNER LIES ON NORTH FACING SLOPE APPROX 30 FT. WEST AND 70 FT. SOUTH OF SHALLOW DRAW.  
CORNER MONUMENT IS APPROX 0.2 FT. ABOVE GROUND LEVEL

**BEARING BASIS:** MAGNETIC COMPASS

BEARING (16° DECLINATION)

**FIRM/AGENCY:** LONE ROCK TIMBER MANAGEMENT CO.

**ADDRESS:** P.O. BOX 1127

ROSEBURG, OR 97470

**PARTY CHIEF:** KEN W. HOFFINE

**NOTES:** GARY ANGIOLET

**WITNESS:** IGNACIO ROMAN

**FILED**  
Date 3/4/2020 By PRB  
This Survey Consist Of:  
1 sheet(s) Map  
0 page(s) Narrative  
**JACKSON COUNTY SURVEYOR**

REGISTERED  
**PROFESSIONAL  
LAND SURVEYOR**

*Ken W. Hoffine*

OREGON  
JULY 16, 1987  
**KEN W. HOFFINE**  
PLS 2291

EXPIRES 6-30-21