

CORNER INVESTIGATION REPORT

FS INDEX ID: N/A

CORNER: AP 3, LOTS
TOWNSHIP: 40S
RANGE: 3W
SECTION: 18
MERIDIAN: WILLAMETTE
NFSL PROPERTY BOUNDARY CORNER?: YES NO

GCDB ID: N/A
STATE: OREGON
COUNTY: JACKSON
FOREST: ROGUE RIVER-SISKIYOU NF
DISTRICT: SISKIYOU MOUNTAINS RD

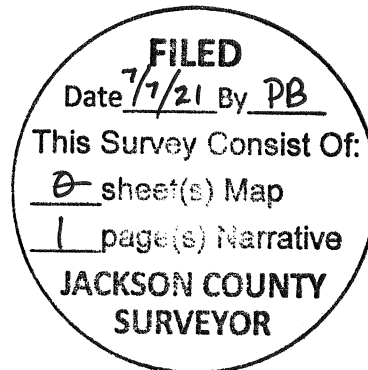
DATE: 1/15/21**HISTORY OF VISITATIONS:****LINE(S) POSTED:****MAINTAINED:** N'LY-2020 W'LY-2020**GUARD POST(S):** N'LY W'LY**CORNER HISTORY:**

SET BY BLM IN 1991, BY STEPHEN L. BAROTT

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**




**OREGON
MAY 8, 2012
JASON M. MARTIN
54729**

RENEWS: 1-1-2023**MONUMENT FOUND/SET:**3 1/2" BRASS CAP ON 2 1/2" PIPE APPROX. 0.2' EXPOSED IN SMALL PILE OF STONES
GOOD CONDITION**RECORD MEASUREMENTS:**BEARS N2 1/4°E, 351ks (23.1')
BEARS S66 1/2°W, 871ks (57.8')**RECORD CORNER ACCESSORIES:**PER BLM NOTES 1991
9" DIA OAK (NOW 11") HEALED BLAZE
21" DIA FIR (NOW 28") HEALED BLAZE**NEW CORNER ACCESSORIES:**

NO NEW ACCESSORIES ESTABLISHED

METHOD OF MEASUREMENT:**CORNER MAINTENANCE/OTHER INFO:**

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREAST HEIGHT.

CAP DIAGRAM:**GEODETTIC COORDINATES:****LATITUDE:** N 42°05'17.2"**LONGITUDE:** W 123°06'12.5"**ELLIPSOID HEIGHT:****DATUM:** WGS-84**SOURCE:** CONSUMER GRADE G.P.S.**DATE OF INVESTIGATION:** 12/13/20**REPORT BY:** JASON MARTIN**FIELD CREW:** DENNIS H. MORTON, PARTY CHIEF
TOM MILSTEAD, FIELD TECH
RYAN BEIL, FIELD TECH**DOCUMENTS ON FILE AT:****THIS DOCUMENT FILED IN CS OFFICE:
OTHER DOCUMENT FILED WITH CS:**