

# CORNER INVESTIGATION REPORT

FS INDEX ID: N/A

CORNER: AP 4, LOT 5      GCDB ID: N/A      DATE: 1/26/21  
TOWNSHIP: 40S      STATE: OREGON  
RANGE: 3W      COUNTY: JACKSON  
SECTION: 18      FOREST: ROGUE RIVER-SISKIYOU NF  
MERIDIAN: WILLAMETTE      DISTRICT: SISKIYOU MOUNTAINS RD  
NFSL PROPERTY BOUNDARY CORNER?:     YES     NO

HISTORY OF VISITATIONS:

LINE(S) POSTED:

MAINTAINED:      E'LY- 2020      S'LY-2020  
GUARD POST(S):      EAST      SOUTH

CORNER HISTORY:

SET BY BLM 1991, BY STEPHEN L. BAROTT

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Jason M. Martin*

**OREGON  
MAY 8, 2012  
JASON M. MARTIN  
54729**

MONUMENT FOUND/SET:

3 1/2" BRASS CAP ON 2 1/2" PIPE, APPROX. 0.1' EXPOSED, IN SMALL PILE OF STONES  
GOOD CONDITION.

RENEWS: /-/- 2023

RECORD CORNER ACCESSORIES:

PER BLM FIELD NOTES 1991  
7" DIA OAK (NOW 10") HEALED BLAZES  
10" DIA FIR (NOW LEANING DEAD)


RECORD MEASUREMENTS:

BEARS N60 1/2°W, 72lks. (47.5')  
BEARS N16 3/4°E, 90lks. (59.4')

FOUND:

8" DIA OAK (JACKSON COUNTY BEARING TAG) HEALED BLAZES

BEARS N28 1/2°E, 60.00'

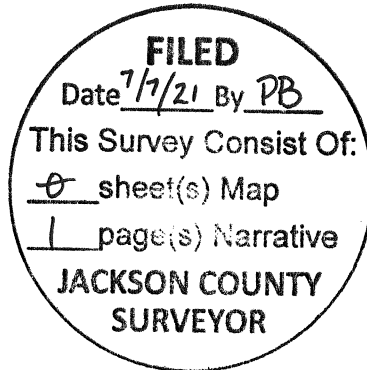

NEW CORNER ACCESSORIES:

NO NEW ACCESSORIES ESTABLISHED

METHOD OF MEASUREMENT:

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT  
HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS  
WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS  
ARE AT BREAST HEIGHT.

CAP DIAGRAM:



GEODETTIC COORDINATES:

LATITUDE: N 42°05'16.3"  
LONGITUDE: W 123°06'13.4"  
ELLIPSOID HEIGHT: ~1736'  
DATUM: WGS-84

DOCUMENTS ON FILE AT:

SOURCE: CONSUMER GRADE G.P.S.

DATE OF INVESTIGATION: 12/24/20

REPORT BY: JASON MARTIN

FIELD CREW: DENNIS H. MORTON, PARTY CHIEF  
TOM MILSTEAD, FIELD TECH  
RYAN BEIL, FIELD TECH

THIS DOCUMENT FILED IN CS OFFICE:

OTHER DOCUMENT FILED WITH CS: