

CORNER INVESTIGATION REPORT

FS INDEX ID: N/A

CORNER: AP 5, LOT 5 **GCDB ID:** N/A **DATE:** 1/24/2021
TOWNSHIP: 40S **STATE:** OREGON
RANGE: 3W **COUNTY:** JACKSON
SECTION: 18 **FOREST:** ROGUE RIVER-SISKIYOU NF
MERIDIAN: WILLAMETTE **DISTRICT:** SISKIYOU MOUNTAINS RD
NFSL PROPERTY BOUNDARY CORNER?: YES NO

HISTORY OF VISITATIONS:LINE(S) POSTED:**MAINTAINED:** NORTH-2020 S-E'LY-2020**GUARD POST(S):** NORTH S-E'LYCORNER HISTORY:

SET BY BLM IN 1991, BY STEPHEN L. BAROTT

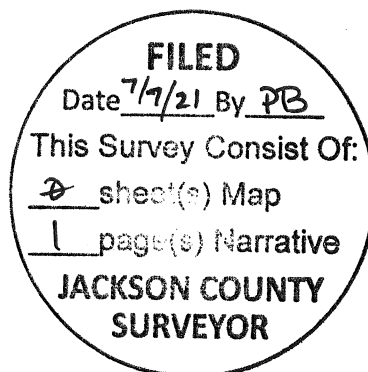
**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Jason M. Martin

**OREGON
MAY 8, 2012
JASON M. MARTIN
54729**

RENEWS: /-/- 2023MONUMENT FOUND/SET:

3 1/2" BRASS CAP ON 2 1/2" PIPE, APPROX. 0.3' EXPOSED, IN SMALL PILE OF STONES, GOOD CONDITION

RECORD MEASUREMENTS:BEARS S11 1/4°E, 61lks. (40.2')
BEARS S73 3/4°W, 54lks. (35.6')RECORD CORNER ACCESSORIES:PER BLM FIELD NOTES 1991
18" DIA OAK (NOW 20") HEALED BLAZE
24" DIA FIR (NOW 27") HEALED BLAZENEW CORNER ACCESSORIES:

NO NEW ACCESSORIES ESTABLISHED

METHOD OF MEASUREMENT:CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREAST HEIGHT.

CAP DIAGRAM:GEODETIC COORDINATES:

LATITUDE: N 42°05'15.0"

LONGITUDE: W 123°06'14.0"

ELLIPSOID HEIGHT: ~1771'

DATUM: WGS-84

SOURCE: CONSUMER GRADE G.P.S.

DATE OF INVESTIGATION: 12/24/20REPORT BY: JASON MARTINFIELD CREW: DENNIS H. MORTON, PARTY CHIEF
TOM MILSTEAD, FIELD TECH
RYAN BEIL, FIELD TECHDOCUMENTS ON FILE AT:THIS DOCUMENT FILED IN CS OFFICE:OTHER DOCUMENT FILED WITH CS: