

CORNER INVESTIGATION REPORT

FS INDEX ID: N/A

CORNER: AP 6, LOT 5 GCDB ID: N/A DATE: 1/24/21
TOWNSHIP: 40S STATE: OREGON
RANGE: 3W COUNTY: JACKSON
SECTION: 18 FOREST: ROGUE RIVER-SISKIYOU NF
MERIDIAN: WILLAMETTE DISTRICT: SISKIYOU MOUNTAINS RD
NFSL PROPERTY BOUNDARY CORNER?: YES NO

HISTORY OF VISITATIONS:

LINE(S) POSTED:

MAINTAINED: S-E'LY-2020 N-W'LY-2020

GUARD POST(S): S-E'LY N-W'LY

CORNER HISTORY:

SET BY BLM IN 1991, BY STEPHEN L. BAROTT

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Jason M. Martin

**OREGON
MAY 8, 2012
JASON M. MARTIN
54729**

RENEWS: 1-1-2023

MONUMENT FOUND/SET:


3 1/2" BRASS CAP ON 2 1/2" PIPE, APPROX. 0.1' EXPOSED, IN SMALL RING OF STONES, GOOD CONDITION

RECORD MEASUREMENTS:

RECORD CORNER ACCESSORIES:

PER BLM FIELD NOTES 1991
 17" DIA FIR (NOW 20") HEALED BLAZE
 8" DIA OAK (NOW 10") HEALED BLAZE

BEARS S8 1/2°W, 55ks, (36.3')
 BEARS N86 1/2°W, 35 1/2lks. (23.4')

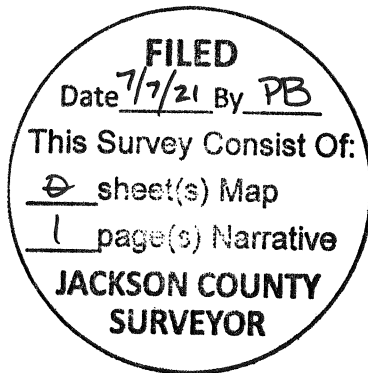

NEW CORNER ACCESSORIES:

NO NEW ACCESSORIES ESTABLISHED

METHOD OF MEASUREMENT:

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREAST HEIGHT.

CAP DIAGRAM:



GEODETIC COORDINATES:

LATITUDE: N 42°05'14.8"
LONGITUDE: W 213°06'13.0"
ELLIPSOID HEIGHT: ~1785'
DATUM: WGS-84

DOCUMENTS ON FILE AT:

SOURCE: CONSUMER GRADE G.P.S.

DATE OF INVESTIGATION: 12/24/20

REPORT BY: JASON MARTIN

FIELD CREW: DENNIS H. MORTON, PARTY CHIEF
 TOM MILSTEAD, FIELD TECH
 RYAN BEIL, FIELD TECH

THIS DOCUMENT FILED IN CS OFFICE:
OTHER DOCUMENT FILED WITH CS: