

CORNER INVESTIGATION REPORT

FS INDEX ID: N/A

CORNER: AP 7, LOTS GCDB ID: N/A DATE: 1/26/21
TOWNSHIP: 40S STATE: OREGON
RANGE: 3W COUNTY: JACKSON
SECTION: 18 FOREST: ROGUE RIVER-SISKIYOU NF
MERIDIAN: WILLAMETTE DISTRICT: SISKIYOU MOUNTAINS RD
NFSL PROPERTY BOUNDARY CORNER?: YES NO

HISTORY OF VISITATIONS:

LINE(S) POSTED:
MAINTAINED: SOUTH-2020 N-W'LY-2020
GUARD POST(S): SOUTH N-W'LY
CORNER HISTORY:
 SET BY BLM IN 1991, BY STEPHEN L. BAROTT

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Jason M. Martin

**OREGON
MAY 8, 2012
JASON M. MARTIN
54729**

RENEWS: 1-1-2023

MONUMENT FOUND/SET:
 3 1/2" BRASS CAP ON 2 1/2" PIPE APPROX. 0.1' EXPOSED, NEXT TO STONES,
 GOOD CONDITION

RECORD MEASUREMENTS:

RECORD CORNER ACCESSORIES:
 PER BLM FIELD NOTES 1991
 23" DIA OAK (NOW 25") HEALED BLAZE
 7" DIA FIR (NOW 17") HEALED BLAZE

BEARS S15 1/2"W, 89lks. (58.7')
 BEARS S69 1/2"W, 62lks. (40.9')


FILED
 Date 7/7/21 By PB
 This Survey Consist Of:
0 sheet(s) Map
1 page(s) Narrative
**JACKSON COUNTY
 SURVEYOR**

NEW CORNER ACCESSORIES:
 NO NEW ACCESSORIES ESTABLISHED

METHOD OF MEASUREMENT:

CORNER MAINTENANCE/OTHER INFO:
 CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT
 HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS
 WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS
 ARE AT BREAST HEIGHT.

CAP DIAGRAM:

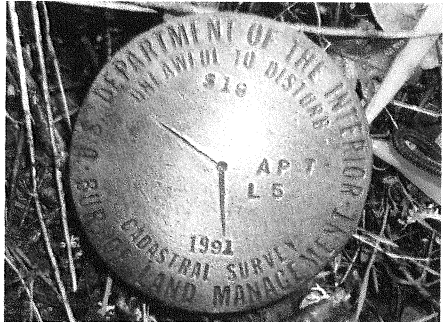

GEODETIC COORDINATES:
 LATITUDE: N 42°05'13.0"
 LONGITUDE: W 123°06'10.1"
 ELLIPSOID HEIGHT: ~1803'
 DATUM: WGS-84
 SOURCE: CONSUMER GRADE G.P.S.
DATE OF INVESTIGATION: 12/24/20
REPORT BY: JASON MARTIN

DOCUMENTS ON FILE AT:

FIELD CREW: DENNIS H. MORTON, PARTY CHIEF
 TOM MILSTEAD, FIELD TECH
 RYAN BEIL, FIELD TECH

THIS DOCUMENT FILED IN CS OFFICE:
OTHER DOCUMENT FILED WITH CS: