

CORNER INVESTIGATION REPORT

FS INDEX ID: L-3

CORNER: CENTER 1/4 GCDB ID: 140440 DATE: 1/15/21
TOWNSHIP: 40S STATE: OREGON
RANGE: 3W COUNTY: JACKSON
SECTION: 18 FOREST: ROGUE RIVER-SISKIYOU NF
MERIDIAN: WILLAMETTE DISTRICT: SISKIYOU MOUNTAINS RD
NFSL PROPERTY BOUNDARY CORNER?: YES NO

HISTORY OF VISITATIONS:

LINE(S) POSTED:
MAINTAINED: NORTH-2020 SOUTH-2020
GUARD POST(S): NORTH SOUTH
CORNER HISTORY:
 SET BY BLM IN 1991, BY STEPHEN L. BARROT

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

Jason M. Martin
**OREGON
MAY 8, 2012
JASON M. MARTIN
54729**


RENEWS: 1-1-2023

MONUMENT FOUND/SET:
 FOUND 3 1/2" BRASS CAP, ON 2 1/2" PIPE, APPROX. 0.3' EXPOSED ON ROCK
 OUTCROP, GOOD CONDITION

RECORD MEASUREMENTS:

BEARS S16°W, 74 1/2 lks, (49.2')
 BEARS N8 1/2°W, 26 1/2 lks, (17.5')

RECORD CORNER ACCESSORIES:
 PER BLM NOTES 1991
 13" DIA OAK (NOW 15.5") SCRIBE VISIBLE
 15" DIA FIR (NOW DEAD WITH 5' TALL STUMP)

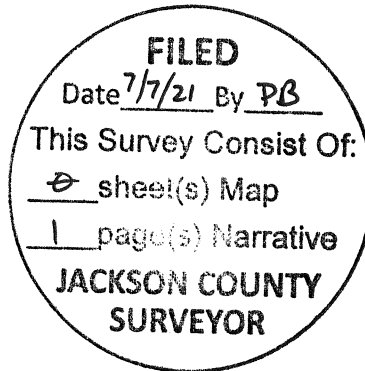


NEW CORNER ACCESSORIES:
 8" DIA OAK BEARS S03°W, 26.6' TO 60D NAIL ON W'LY SIDE OF TREE,
 SCRIBED "X" "BT"

METHOD OF MEASUREMENT:
 COMPASS AND TAPE

CORNER MAINTENANCE/OTHER INFO:
 CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT
 HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS
 WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS
 ARE AT BREAST HEIGHT.

CAP DIAGRAM:



GEODETTIC COORDINATES:
LATITUDE: N 42°05'27.1"
LONGITUDE: W 123°06'09.9"
ELLIPSOID HEIGHT: ~1680
DATUM: WGS-84
SOURCE: CONSUMER GRADE G.P.S.
DATE OF INVESTIGATION: 12/23/20
REPORT BY: JASON MARTIN

DOCUMENTS ON FILE AT:

FIELD CREW: DENNIS H. MORTON, PARTY CHIEF
 TOM MILSTEAD, FIELD TECH
 RYAN BEIL, FIELD TECH

THIS DOCUMENT FILED IN CS OFFICE:
OTHER DOCUMENT FILED WITH CS: