

CORNER INVESTIGATION REPORT

FS INDEX ID: F-5

CORNER: NORTH 1/16 GCDB ID: 200560 DATE: 1/14/21
TOWNSHIP: 40S STATE: OREGON
RANGE: 3W COUNTY: JACKSON
SECTION: 7 & 8 FOREST: ROGUE RIVER-SISKIYOU NF
MERIDIAN: WILLAMETTE DISTRICT: SISKIYOU MOUNTAINS RD
NFSL PROPERTY BOUNDARY CORNER?: YES NO

LINE(S) POSTED:

MAINTAINED: SOUTH-2020 EAST-2020
GUARD POST(S): SOUTH EAST

CORNER HISTORY:

RE-MONUMENTED BY MALCOM N. CLARK, ON FILED SURVEY 8439
 VISITED BY KURT C. WEAVER ON FILED SURVEY 8681

HISTORY OF VISITATIONS:

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Jason M. Martin
**OREGON
 MAY 8, 2012
 JASON M. MARTIN
 54729**

RENEWS: 1-1-2023

MONUMENT FOUND/SET:


2 1/2" BRASS CAP ON 2 1/2" PIPE, APPROX. 0.4' EXPOSED, NO STONES, GOOD
 CONDITION

RECORD CORNER ACCESSORIES:

PER FILED SURVEY 8439
 7" DIA FIR (NOW 11") HEALED BLAZES
 12" DIA FIR (NOW 17") HEALED BLAZES
 8" DIA FIR (NOW 16") HEALED BLAZES

RECORD MEASUREMENTS:

BEARS N71°E, 6.4'
 BEARS N69°E, 16.9'
 BEARS S36°W, 13.6'

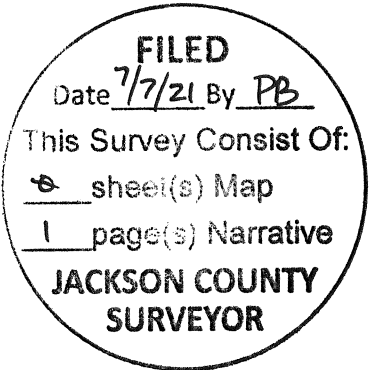

NEW CORNER ACCESSORIES:

NO NEW ACCESSORIES ESTABLISHED

METHOD OF MEASUREMENT:

CORNER MAINTENANCE/OTHER INFO:

CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT
 HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS
 WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS
 ARE AT BREAST HEIGHT.

GEODETTIC COORDINATES:

LATITUDE: N 42°06'33.0"
 LONGITUDE: W 123°05'35.1
 ELLIPSOID HEIGHT: ~1871
 DATUM: WGS-84

DOCUMENTS ON FILE AT:

SOURCE: CONSUMER GRADE G.P.S.
DATE OF INVESTIGATION: 12/14/20
REPORT BY: JASON MARTIN

FIELD CREW: DENNIS H. MORTON, PARTY CHIEF
 TOM MILSTEAD, FIELD TECH

THIS DOCUMENT FILED IN CS OFFICE:
OTHER DOCUMENT FILED WITH CS:

CAP DIAGRAM:

