

24081

# CORNER INVESTIGATION REPORT

**FS INDEX ID:** H 3/4, 4 3/4

**CORNER:** W.C. SE-SE-SE 1/256    **GCDB ID:** 175505    **DATE:** 03/01/2024  
**TOWNSHIP:** 40S    **STATE:** OREGON  
**RANGE:** 3W    **COUNTY:** JACKSON  
**SECTION:** 7    **FOREST:** ROGUE RIVER-SISKIYOU NF  
**MERIDIAN:** WILLAMETTE    **DISTRICT:** SISKIYOU MOUNTAINS RD  
**NFSL PROPERTY BOUNDARY CORNER?:**  YES  NO

HISTORY OF VISITATIONS:

**LINE(S) POSTED:**  
**MAINTAINED:** WEST-2021  
**GUARD POST(S):** EAST WEST

**CORNER HISTORY:**  
 SET ON FILED SURVEY 8439, BY MALCOLM N. CLARK

**MONUMENT FOUND/SET:**  
 FOUND A 2 1/2" BRASS CAP ON 2 1/2" PIPE, IN SMALL PILE OF STONES, APPROX. 1.0' EXPOSED, SET FIRM, GOOD CONDITION


**RECORD CORNER ACCESSORIES:**  
 PER FILED SURVEY 8439:

RECORD MEASUREMENTS:

18" DIA OAK (NOW 22.5" ), HEALED BLAZES  
 12" DIA OAK ( NOW 18" ), HEALED BLAZES

BEARS N53°E, 108.1'  
 BEARS N40°45'W, 26.6'

**NEW CORNER ACCESSORIES:**  
 NO NEW ACCESSORIES ESTABLISHED

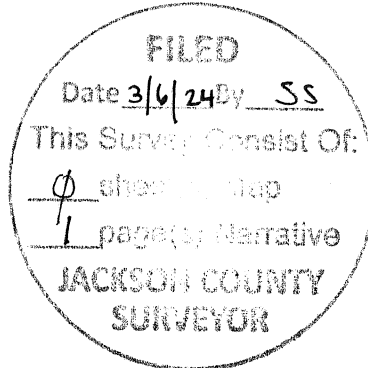

METHOD OF MEASUREMENT:

**CORNER MAINTENANCE/OTHER INFO:**  
 CLEAR BRUSH FROM AROUND MONUMENT & TO BT'S. BT FACES & A 6" BAND AT HEAD HEIGHT PAINTED RED. ADD NEW NAILS TO BT TAGS & ADD NEW TAGS WHERE NEEDED. MONUMENT SIZES ARE OUTSIDE DIAMETER & BT DIAMETERS ARE AT BREST HEIGHT.  
 THIS NEW REPORT REFLECTS CORRECTIONS TO 23399 (ie: CORRECTED WHICH SURVEY THE MONUMENT WAS SET ON AND THE GCDB NUMBER).

CAP DIAGRAM:

**GEODETIC COORDINATES:**  
 LATITUDE: N 42°05'56.8"  
 LONGITUDE: W 123°05'48.8"  
 ELLIPSOID HEIGHT: ~1701'  
 DATUM: WGS-84  
 SOURCE: CONSUMER GRADE G.P.S.  
**DATE OF INVESTIGATION:** 3/24/21

DOCUMENTS ON FILE AT:



**REPORT BY:** JASON MARTIN  
**FIELD CREW:** DENNIS H. MORTON, PARTY CHIEF  
 TOM MILSTEAD, FIELD TECH

**THIS DOCUMENT FILED IN CS OFFICE:**  
**OTHER DOCUMENT FILED WITH CS:**

24081