

2632

CHARLES H. HURST, L. S.
REGISTERED PROFESSIONAL LAND SURVEYOR
CONSULTING FORESTER
765 SUNRISE AVENUE
MEDFORD, OREGON 97501

September 25, 1964

County Surveyor
Jackson County Courthouse
Medford, Oregon


Dear Sir:

With reference to special instructions of January 22, 1917, Group 36, issued to cadastral engineer Elmer F. Strickler, the following information is submitted:

At the 1/4 corner common to Sections 11 and 12, T. 33 S., R. 1 W., W.M. Found a 2" brass cap monument with witness tree destroyed in the SE quadrant. There being no suitable trees in Section 12 adjacent to the corner as a result of logging, I scribed a 11.2" Hemlock " 1/4 S 11 483 BT " bearing N 76¹⁰ W 74 links distant.

At the section corner common to Sections 35 and 36, T. 32 S., R. 1 W. and Sections 1 and 2, T. 33 S., R. 1 W. Found a 2" brass cap monument with witness tree destroyed in the NW quadrant as a result of logging. I scribed a White fir "T32S R1W S35 483BT" bearing N 19⁶ W 68 links distant, said fir being 6.6" in diameter.

Witness trees so scribed were measured to center. Observed declination was 19^{1/2}⁰ E.

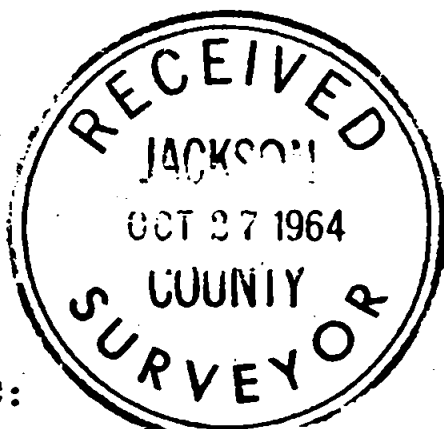

cc:

Bureau of Land Management
Steve Wilson

Sincerely,

Charles H. Hurst



Charles H. Hurst

