

Survey No. 2779

SURVEY NARRATIVE TO COMPLY WITH O.R.S. 209.250, REVISED BY CHAPTER 555,  
O.L. 1963.

FOR - ELK LUMBER COMPANY  
P. O. BOX 606, MEDFORD, OREGON

Purpose -

To remonument and perpetuate the quarter section corner common to sections  
26 and 35, Township 32 South, Range 1 East, Willamette Meridian.

PROCEDURE -

Found the original stone monument, not in place and by retracing its  
logical course of movement, found the badly deteriorated remains of  
the original Northwest BT. All markings have been destroyed by  
decay but outline of healed blaze was visible in bark. Found traces  
of rotted wood at record location of original Southeast B. T.


At the record bearing and distance from the stump remains of the original  
Northwest BT, set a 1 inch by 36 inch galvanized steel pipe driven 30 inches  
in the ground and capped with a 1-1/2 inch to 1 inch galvanized bell reducer  
filled with pot metal and stamped as shown below in 1/8 inch letters and  
numerals:

RS 583  
T32S R1E  
 $\frac{2}{6}$   
 $\frac{3}{5}$   
1/4 COR  
1965

From the above described corner monument, an 8 inch Douglas fir bears  
South 38-1/2° East 9.6 feet, and a 9 inch Douglas fir bears North 26°  
West 11.9 feet. Both trees are double blazed and scribed "RS 583" in  
the upper face and "BT" in the lower.

Distances were measured to face of blaze and compass variation was  
set at 20° 00' East.

Field work completed April 16, 1965.

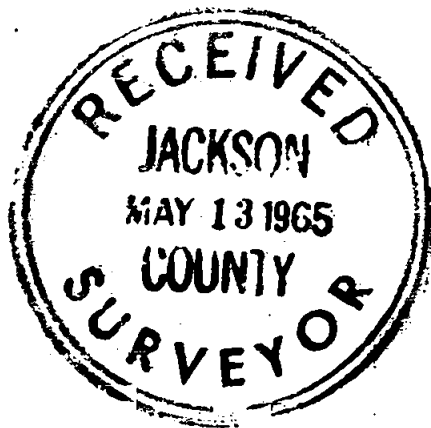

*Robert M. Vincent*

