

**SURVEY NARRATIVE TO COMPLY WITH O. R. S. 209.250,
REVISED BY CHAPTER 555, O. L. 1963.**

**FOR: ELK LUMBER COMPANY
P. O. BOX 606, MEDFORD, OREGON**

PURPOSE - To rehabilitate and perpetuate the section corner common to Sections 11, 12, 13 and 14, Township 32 South, Range 1 East, Willamette Meridian.

PROCEDURE -

At the corner point found a 3/4 inch by 36 inch steel pipe driven 30 inches in the ground and capped with a one and one-half to three quarter inch galvanized bell reducer filled with pot metal and stamped as shown below:


4-12-1950
T32S R1E
11 / 12
14 / 13
SEC COR

This pipe was set by Elk Lumber Company foresters, John Fleeger and R. Vincent in 1950. The original stone of approximately record size and showing definite notches is placed alongside the pipe monument. From this pipe monument, the original Northeast BT (now a 16" Black Oak) bears North 24° East 15.5 feet to outside of healed face. BLM "BT" poster and location tag on this tree. The original Southeast BT (now a 38" Douglas Fir) bears South 56° East ^{50.2 feet} to outside of healed over face, which I had opened in 1946 to observe scribing. A possible Southwest BT (20" hollow Black Oak) bears South 41° 00' West 91.4 feet. This distance compares favorably with the record but the record bearing is South 58° West, the same numerical value as the bearing called for the original Northwest BT, of which we found no trace.

I added "RS 583 1965" to the stamping on the existing corner monument and marked new BTs as follow:

From the above described pipe monument, an 8 inch Douglas fir bears N 42° E. 13.1 feet; a 14 inch Douglas fir bears N 44° 30' W 11.8 feet, and a 13 inch Douglas fir bears S 34° 30' W 30.85 feet. All these trees are double blazed and scribed "RS 583" in the upper blaze and BT in the lower. Distances were measured to face of blaze and compass variation was set at 20° 00' East.

Field work completed on August 27, 1965 by Vincent and Brandt.

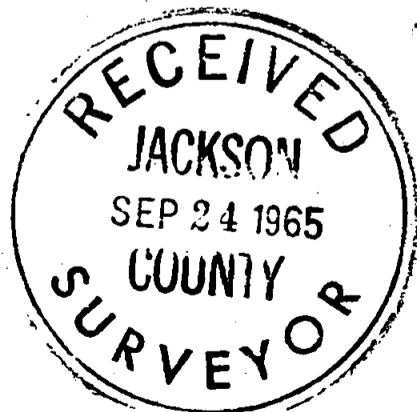

Robert M. Vincent

