

Butte Falls, Oregon  
December 20, 1966

3323

County Surveyor  
Jackson County Courthouse  
Medford, Oregon

SUBJECT: Public land survey.


OBJECT: To remonument existing corner;  $\frac{1}{4}$  corner between Sections 7, T. 36S, R. 3E and 12, T. 36S, R. 2E, Willamette Meridian.

NARRATIVE: 1963 U.S. Brass Cap and 3 of 4 BTs gone or destroyed by road construction by corner location.

Set;  $\frac{5}{8}$ " x 3' rebar and Aluminum cap at corner location from one existing 1963 BT, being a 7" W. Fir S62 $\frac{1}{2}$ "<sup>OW</sup> 90 links; on line blazes.

Scribed; 10" Cedar N40°E 81.8'  
RS 461  
 $\frac{1}{4}$  BT

RS 461  
12 / 7  
 $\frac{1}{4}$

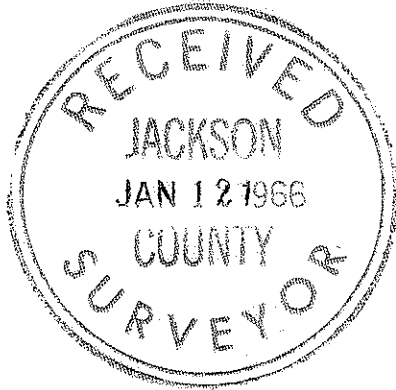

100-111