


Survey narrative to comply with ORS 209.250, Oregon State Law

For: Steve Wilson, P.O. Box 382, White City, Oregon

Purpose: To reestablish the Quarter Section corner common to Sections 3 and 10, Township 38 South, Range 4 East, W.M., Jackson County, Oregon.

Procedure: I set a 2" + 2" post at the location of this corner from an original B.T., a 30" white fir stump, the iron marks B.T. plainly visible in cut in base of the stump which bears N. 8° E. 9 links from the post set. This post was set by myself in 1954 that the corner would not be destroyed during road construction and witnessed same as follows: The center of a 34" red fir bears N. 70° W. 42.5 feet and the center of a 26" white fir bears S. 43° E. 23.4 feet. During road widening by Steve Wilson the B.T. stump had been removed.

Sept. 1962 I set a railroad spike in rock for the 1/4 corner from the references of 1954 and re witnessed this corner as follows; Notched the base of a white fir 26" in dia. and drove a R.R. spike, the head of which bears S. 44° E. 22.10 feet from the corner, also scribed the tree L.S. 21, 1/4 B.T. Also scribed a 34" white fir, 1/4 B.T. and drove a R.R. spike in base of same which bears N. 43° 15' E. 66.60 feet.

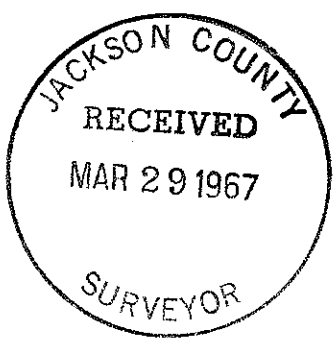

*L. E. Ager*

