

L447

SURVEY NARRATIVE TO COMPLY WITH PARAGRAPH 209.250  
OREGON REVISED STATUTES

SURVEY FOR: Thomas Agnew  
Box 500 Highway 62  
Trail, Oregon

LOCATION: North One Quarter (1/4) Corner, Township 33 South,  
Range 1 West, Willamette Meridian, Jackson County,  
Oregon.

PURPOSE: To re-establish the above described One Quarter (1/4)  
Corner.

Found original bearing tree to Southeast intact with scribe  
visible as reported previously by Lowell Ager. Also found depression  
of stump hole to Northeast, both in the original described position.



Found a 1" rebar for corner set by Lowell Ager as shown in  
Recorded Survey No. 2302.

Scribed an 8" White Oak scribed 1/4 S36, which bears North 22°  
10' East 41.10 feet.

Scribed an 11" White Oak scribed 1/4 S25, which bears South 35°  
50' East 33.00 feet.

Measurements for both trees are to tree centers.

December 18, 1970

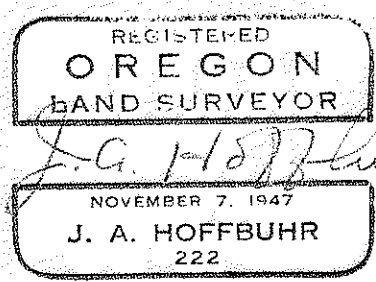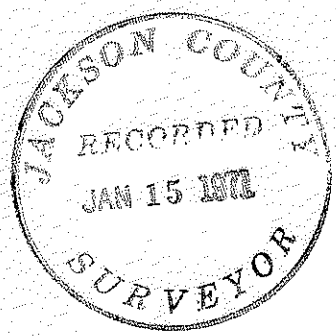

J. A. Hoffbuhr  
Registered Land Surveyor