


SURVEY NO. 5110

SURVEY NARRATIVE TO COMPLY WITH O. R. S. 209.250

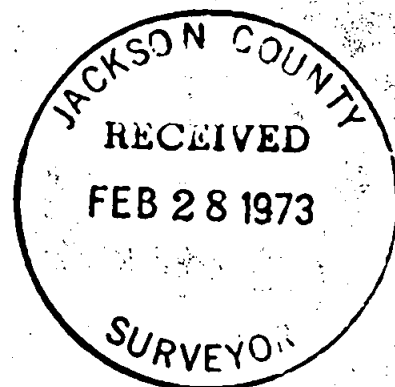

FOR: Clifford Moran
c/o Palm Motel
1065 Siskiyou Boulevard
Ashland, Oregon 97520

PURPOSE: To locate, monument and reference the Quarter corner common to Sections 12 and 13, T39SR1W, W. M..

PROCEDURE: Utilizing a one-second theodolite, an electronic measuring instrument and chain, traversed from the re-established Northeast corner of said Section 13 to the vicinity of said Quarter corner and Corner No. 1 of the California patented Mineral Claim. From the measurement data, said Claim corner and the topographic call to the top of ridge, located said Quarter corner.

At the Quarter corner common to Sections 12 and 13, Township 39 South, Range 1 West, W. M., set a 3/4" x 36" galvanized iron pipe, 31" in the ground for corner, from which:

The original bearing tree (now a down Yellow Pine with scribe marks plain) bears North 77° East, 9.24 feet to the center of the stump hole (Record = 10" Y. Pine, N 71° E, 9.24 feet);

The original bearing tree (now a down Y. Pine broken-off stub with scribe marks plain) bears South 37° East, 17.82 feet to the center of the stump hole (Record = 12" Y. Pine, S 43° E, 17.82 feet).

I establish new bearing trees as follows:

Scribed a 22" Fir "1/4S - BT" which bears S 64° W, 22.4 feet to the face of the lower blaze,

Scribed a 15" Fir "1/4S - BT" which bears N 80° W, 36.8 feet to the face of the lower blaze.

NOTE: Said traverse was not connected to the Quarter corner position, and the bearings referred to at the corner are by Brunton

Compass, Variation 20° East. Gary Kaiser and

Lloyd Shreeve found said corner and referenced

same in the presence of Clifford Moran on Feb. 20, 1973.

February 26, 1973

