


CORNER RESTORATION

CORNER SW Cor. Sec. 6 TSP. 41S RANGE 5E

ORIGINAL SURVEY BY: Wm. M. Turner & James Howard

CONTRACT NUMBER: 132

CONTRACT DATE: Sept. 9, 1870

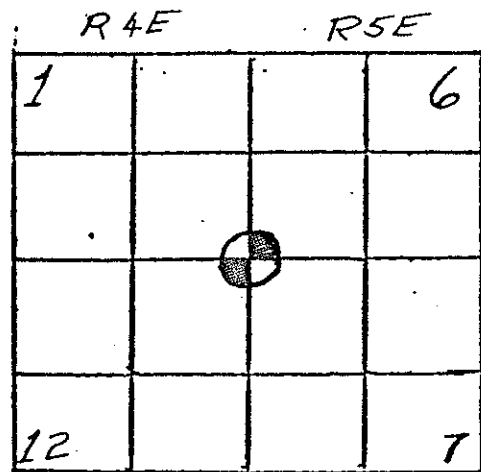

ORIGINAL DESCRIPTION: Set a sandstone 14" x 12" x 10" from which:  
 A White Oak, 12" in diameter, bears N42°W, 90 Lks. distance  
 A White Oak, 14" in diameter, bears N61°E, 200 Lks. distance  
 A White Oak, 24" in diameter, bears S49°W, 148 Lks. distance

RESTORATION BY AND DATE:

G. R. Clark, G. Mulvey, M. H. Gallagher, & D. Edwards 27 April, 1973

EVIDENCE FOUND: The B.T. to the NE is dead and down, the SW B.T. is dead and the NW B.T. is gone. Found a stone mound that fits for bearing and distance from the B.T.s found stone fitting general discription, but had no discernable markings.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:  
 SHOW HOW TREES ARE SCRIBED AND BASIS OF BEARING, INCLUDING COMPASS VARIATION.

Set 5/8" x 30" I.R. from B.T.s which fell in existing rock mound built up rock mound. Did not set any reference trees.

